

Technical data sheet



Product: 9

Manufacturer: 3M DEUTSCHLAND GMBH

Product group: ELEKTRO

Article group: VERGUSSMASSE

Download: 30.05.2026

SCOTCHCAST® ELECTRICAL RESIN 9

This data sheet was provided to you by Tewipack Uhl GmbH. The company tewipack Uhl GmbH assumes no responsibility for the topicality and the Accuracy of the information contained. The properties of the products can vary due to various influences such as composition and condition of the Substrate, impurities in or on the substrate, temperature and humidity at the Change storage and environmental conditions during use. Using this product in combination with other material, the customer is responsible for to check through our own tests whether the product is suitable for the planned combination and whether this combination delivers the expected results

Tewipack Uhl GmbH
Industriestraße 15
D-75382 Althengstett

Telephone:
+49(0)7051/9297-0
Fax:
+49(0)7051/9297-99

E-Mail:
info@tewipack.de
Website:
www.tewipack.de

Managing director:
Alexander Uhl,
Michael Uhl
HRB 330424
Amtsgericht
Stuttgart

Bank details:
Sparkasse
Sindelfingen
Pforzheim
Calw
BLZ 666 500
85
Konto 17 787

Commerzbank
Sindelfingen
BLZ 603 400 71
Konto 8 001 166

Vereinigte
Volksbank AG
Böblingen
BLZ 603 900 00
Konto 80 089
003

Postbank
Stuttgart
BLZ 600 100
70
Konto 146
294 708



Scotchcast[®] Electrical Resin 9

Two-Part, Room-Curing, Class B (130°C), Semiflexible, Filled Epoxy Liquid Resin

1. Product Description

3M™ Scotchcast[®] Electrical Resin 9 is an easy-to-use resin system possessing medium viscosity and unique handling properties. It has a simple 1:1 mix ratio (by weight), a low toxicity potential and is frequently used in applications requiring excellent thermal shock and mechanical shock resistance. The resin's low exotherm and good pot life allow the user to mix substantial quantities at one time. High adhesion, low stress and low exotherm also reduce the effect of strain and temperature on sensitive components that have been coated with this resin.

- Good handling qualities
- Low exotherm
- High thermal and mechanical shock resistance

2. Handling Properties

Mix Ratio (A:B)	Wt1:1 Vol (%) 47:53
Viscosity @ 23°C (73°F)	A = 90,000 cps B = 20,000 cps Mixed = 28,000 cps
Density	A = 1,448 kg/l B = 1,280 kg/l
Flash Point	A = 201°C B = 180°C
Gel Time	28 min. @ 60°C
Curing Guide	23°C 24-48 hrs 60°C 2 hrs 95°C 1 hr

Insert Company
address
before issue

Reference: AABDD51101#EN_01
© 3M 2014 All Rights Reserved.

Issue date 16.01.2017
Supersedes

3. Typical Properties

Physical Properties	Typical Value
Color	Brown
Hardness (Shore D)	70
Specific Gravity (cured)	1.42
Compressive Strength ¹ 10% Compression	309 kg/cm ²
Tensile Strength ² Ultimate	155 kg/cm ²
Elongation (% at break) ²	19
Flexural Strength ³	77 kg/cm ²
Thermal Conductivity ⁴ (Cal • cm/cm ² • sec • °C)	7,4 x 10 ⁻⁴
Linear Thermal Expansion ⁴ (23°C to 113°C) (length/unit length/°C)	13 x 10 ⁻⁵
Thermal Shock ⁴	pass
Thermal Shock ⁶ 10 cycles – 55 to 130C 6,35 mm Olyphant Insert	pass
Electric Strength ⁵ 3,175 mm sample	13,8 kV/mm
Mechanical Shock ⁴	3,5 kg
Moisture Absorption ⁴ % weight increase, 240 hrs. @ 96% R.H.	0.8
Thermal Aging % weight loss, 1000 hrs. @ 130°C Hardness Change (Shore D)	2.5 +13
Dielectric Constant ⁷ 1000 Hz 23°C	4.6
Dissipation Factor ⁷ 1000 Hz 23°C	0.10
Volume Resistivity ⁸ 23°C (ohm-cm)	1x10 ¹³
Oiling Water Resistance 7 days - % weight gain - Hardness Change (Shore D)	2.5 -8
Flamability ⁴	Self-extinguishing

Test Methods:

¹Fed. Std. No. 406, Method 1021

²Fed. Std. No. 406, Method 1011

³Fed. Std. No. 406, Method 1031

⁴MIL-I-16923E

⁵Fed. Std. No. 406, Method 4031

⁶3M Test Method

⁷Fed. Std. No. 406, Method 4021

⁸Fed. Std. No. 406, Method 4041

Note: These are typical values and should not be used for specification purposes.

Insert Company
address
before issue

Reference: AABDD51101#EN_01

© 3M 2014 All Rights Reserved.

Issue date 16.01.2017
Supersedes

4. User Information

4.1 Mixing

Mix the separate parts before removing them from their containers. They may be warmed to 60°C to aid the mixing process. (Gel time is approximately 30 minutes @ 60°C). Thoroughly mix parts A and B in the correct proportions. Mix until the color is uniform or a homogeneous mixture is obtained.

4.2 Deaerating

Air introduced during mixing can be removed by evacuating at 5 to 10 mm of mercury (Hg) absolute pressure. The 3M™ Scotchcast® Electrical Resin can be warmed to aid air removal. The container side wall should be four times the height of the liquid resin to contain the foaming that takes place under vacuum.

4.3 Casting and Impregnating

Pour the warm resin into the preheated 100°C mold. If no mold is used, dip the preheated part into the resin. Heating the part, resin and mold aids impregnation. Evacuate at 5 mm of mercury (Hg) absolute pressure, or pour under vacuum and hold for several minutes before releasing.

4.4 Curing

Where minimum stress and maximum thermal shock resistance are required, the ambient temperature cure cycle is recommended. If an oven cure is used, time should be added to the cure cycle to allow the resin to reach the curing temperature. Cure using cycles shown under **Handling Properties**. Where higher temperatures are not objectionable and the size of the casting not excessive, the resin can be quick-cured in one hour at 95°C.

4.5 Shelf Life & Storage

Both parts of this resin system should be stored at temperatures between 20°C to 30°C, and 30% to 60% relative humidity. When not in use, containers should be kept tightly closed. Storage at conditions outside those suggested may compromise the performance of the resin.


5. Handling and Safety Precautions

Read all Health Hazard, Precautionary and First Aid statements found in the Material Safety Data Sheet (MSDS) and/or product label of chemicals prior to handling or use.


Insert Company
address
before issue

Reference: AABDD51101#EN_01
© 3M 2014 All Rights Reserved.

Issue date 16.01.2017
Supersedes

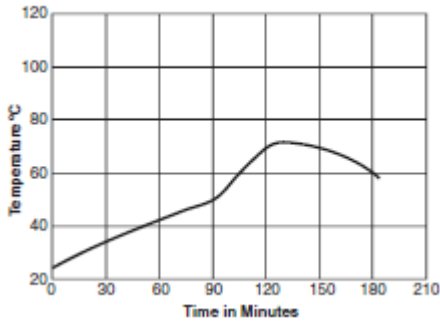


Exothermic Heat Rise for 1lb. Sample

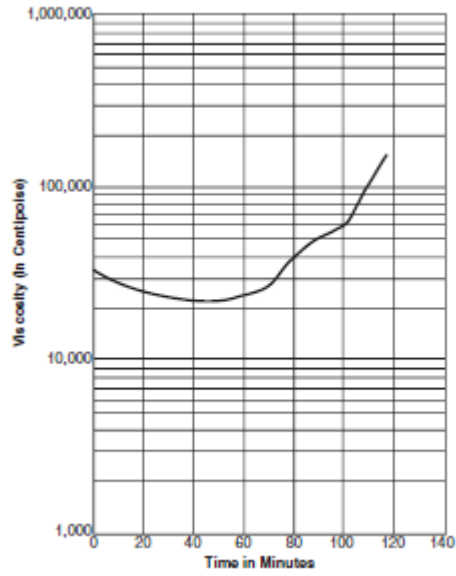


Brookfield Viscosity vs Time @ 23°C 1 lb. sample

Volume Resistivity (ohm-cm)
Fed. Std. No. 406, Method 4041

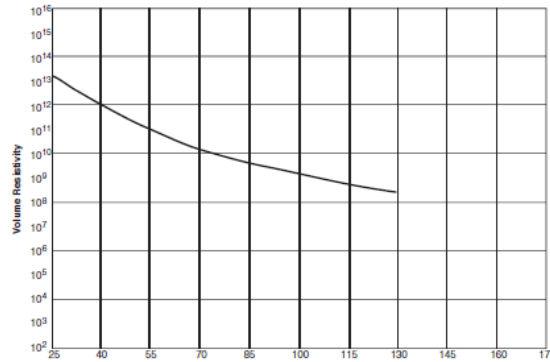

Dissipation Factor %
Fed. Std. No. 406
(Test Frequencies in Hertz)

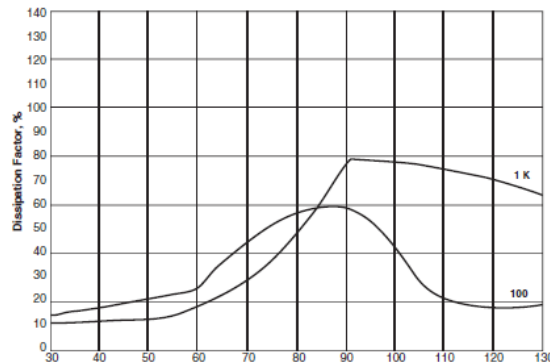

Insert Company
address
before issue


Reference: AABDD51101#EN_01

Issue date 16.01.2017
Supersedes

© 3M 2014 All Rights Reserved.

Dielectric Constant

Fed. Std. No. 406, Method 4021
(Test Frequencies in Hertz)

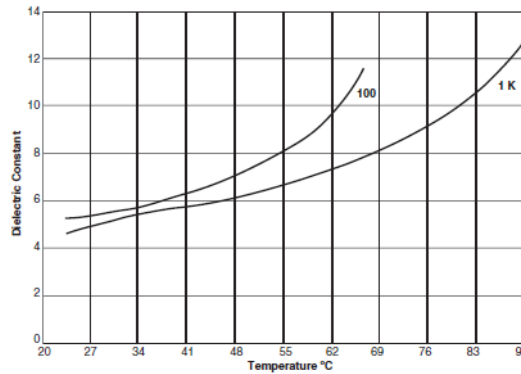

6. Additional Information

To request additional product information see address below.

Important Notice

All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluates the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method or application.

Values presented have been determined by standard test methods and are average values not meant to be used for specification purposes.

All questions of warranty and liability relating to 3M products are governed by the terms of the respective sale subject, where applicable, to the prevailing law.

3M is a trademark of the 3M Company.

Insert Company
address
before issue

Reference: AABDD51101#EN_01
© 3M 2014 All Rights Reserved.

Issue date 16.01.2017
Supersedes