

# Technical data sheet



Product: ES569

Manufacturer: PERMABOND ENGINEERING ADHESIVES

Product group: KLEBSTOFF

Article group: 1-K KLEBSTOFF

Download: 22.05.2024

## PERMABOND® ES569

This data sheet was provided to you by Tewipack Uhl GmbH. The company tewipack Uhl GmbH assumes no responsibility for the topicality and the Accuracy of the information contained. The properties of the products can vary due to various influences such as composition and condition of the Substrate, impurities in or on the substrate, temperature and humidity at the Change storage and environmental conditions during use. Using this product in combination with other material, the customer is responsible for to check through our own tests whether the product is suitable for the planned combination and whether this combination delivers the expected results

Tewipack Uhl GmbH  
Industriestraße 15  
D-75382 Althengstett

Telephone:  
+49(0)7051/9297-0  
Fax:  
+49(0)7051/9297-99

E-Mail:  
info@tewipack.de  
Website:  
www.tewipack.de

Managing director:  
Alexander Uhl,  
Michael Uhl  
HRB 330424  
Amtsgericht  
Stuttgart

Bank details:  
Sparkasse  
Sindelfingen  
Pforzheim  
Calw  
BLZ 666 500  
85  
Konto 17 787

Commerzbank  
Sindelfingen  
BLZ 603 400 71  
Konto 8 001 166

Vereinigte  
Volksbank AG  
Böblingen  
BLZ 603 900 00  
Konto 80 089  
003

Postbank  
Stuttgart  
BLZ 600 100  
70  
Konto 146  
294 708

### Features & Benefits

- Excellent adhesive strength
- Excellent resistance to vibration
- Easy to use – no mixing required
- High shear and peel strength
- High temperature resistance
- Good resistance to chemicals
- Non-sag, thixotropic

### Description

PERMABOND® ES569 is a single-part heat cured epoxy adhesive with excellent adhesion to metal surfaces as well as composite materials. The high bond strength of this adhesive allows it to replace mechanical fastening, soldering, brazing or welding. ES569 has been designed to be non-sagging, allowing the product to be used in large gaps and on vertical surfaces. It is also ideal for bonding electronic components as it has high wet strength and is non-stringing and produces an excellent drop profile as well as withstanding solder reflow processes.

### Physical Properties of Uncured Adhesive

Chemical composition	Epoxy Resin
Appearance	Black paste
Viscosity @ 25°C	250,000 to 500,000 mPa.s (cP)
Specific gravity	1.2

### Typical Curing Properties

Flow at high temperature	No flow, high wet strength
Maximum gap fill	5 mm 0.2 in
Cure speed (oven) *	130° C (266°F): 75 minutes 150°C (300°F): 60 minutes 170°C (338°F): 40 minutes
Cure speed (induction)	<3 minutes


\*Actual cure times will depend on the time it takes for the adhesive to reach this temperature - for example, large assemblies or a crowded oven will require longer to reach full cure. Alternative, quicker methods of curing include induction, hotplates, infrared lamps and hot-air guns.

### Typical Performance of Cured Adhesive

Shear strength* (ISO4587)	Steel 27 – 41 N/mm <sup>2</sup> (4000 – 6000 psi) Aluminium 17 - 31 N/mm <sup>2</sup> (2500 – 4500 psi) Zinc 14 - 27 N/mm <sup>2</sup> (2000 – 4000 psi) FRP Glass/Epoxy 9-11 N/mm <sup>2</sup> (1300–1600psi) Carbon Fibre 10-12 N/mm <sup>2</sup> (1450–1700psi)
Peel strength (aluminium) (ISO 4578)	100-120 N/25mm
Hardness (ISO868)	80-85 Shore D
Coefficient of thermal expansion	90 x 10 <sup>-6</sup> mm/mm/°C (under Tg) 180 x 10 <sup>-6</sup> mm/mm/°C (above Tg)
Thermal conductivity	0.5 W/(m.K)
Glass transition temperature (Tg – DSC)	130°C (266°F)

\*Strength results will vary depending on the level of surface preparation and gap.

### Hot Strength

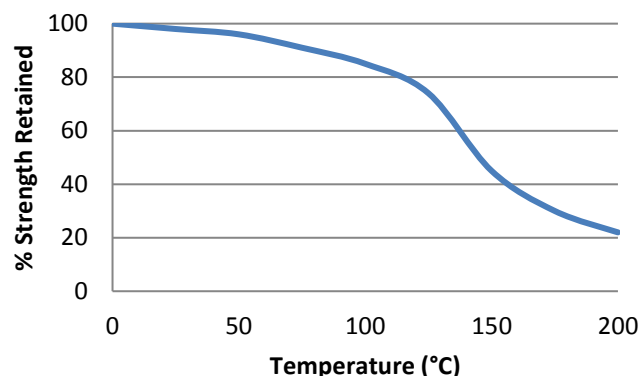


then conditioned to pull temperature for 30 minutes before testing. ES569 can withstand higher temperatures for brief periods (such as for paint baking and wave soldering processes) providing the joint is not unduly stressed. The minimum temperature the cured adhesive can be exposed to is -40°C (-40°F) depending on the materials being bonded.

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.

## Chemical Resistance

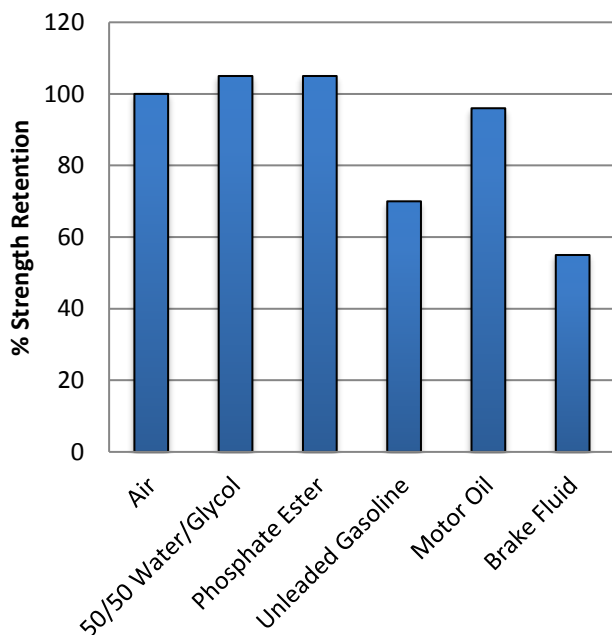

Specimens were immersed for 30 days at 85°C and tested at room temperature.

## Additional Information

This product is not recommended for use in contact with strong oxidizing materials.

Information regarding the safe handling of this material may be obtained from the safety data sheet (SDS).

Users are reminded that all materials, whether innocuous or not, should be handled in accordance with the principles of good industrial hygiene.

**This Technical Datasheet (TDS) offers guideline information and does not constitute a specification.**

## Storage & Handling

Storage Temperature	2 to 7°C (35 to 45°F)
---------------------	-----------------------

## Surface Preparation

Surfaces should be clean, dry and grease-free before applying the adhesive. Use a suitable solvent (such as acetone or isopropanol) for the degreasing of surfaces. Some metals such as aluminium, copper and its alloys will benefit from light abrasion with emery cloth (or similar), to remove the oxide layer.

## Directions for Use

- 1) The adhesive should be dispensed from the bottle via the nozzle supplied (this can be cut to give the appropriate sized bead to cover the bond area).
- 2) Apply the adhesive to one surface and avoid entrapping air.
- 3) Assemble parts applying sufficient pressure to ensure the adhesive spreads to cover the entire bond area.
- 4) Use a jig / clamp to prevent parts moving during cure.
- 5) It is advisable not to disturb the joint until the adhesive is fully cured.
- 6) Cure with heat – see page one for cure schedule.

## Video Links

Surface preparation:

<https://youtu.be/8CMOMP7hXjU>



Single-part epoxy directions for use:

<https://youtu.be/KupaieuuZw>



[www.permabond.com](http://www.permabond.com)

• UK: 0800 975 9800

• General Enquiries: +44 (0)1962 711661

• US: 732-868-1372

• Asia: + 86 21 5773 4913

[info.europe@permabond.com](mailto:info.europe@permabond.com)

[info.americas@permabond.com](mailto:info.americas@permabond.com)

[info.asia@permabond.com](mailto:info.asia@permabond.com)

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.