

Technical data sheet



Product: 3550

Manufacturer: 3M DEUTSCHLAND GMBH

Product group: KLEBSTOFF

Article group: 2-K KLEBSTOFF

Download: 02.06.2025

3M SCOTCH-WELD EC-3550 B/A FST

This data sheet was provided to you by Tewipack Uhl GmbH. The company tewipack Uhl GmbH assumes no responsibility for the topicality and the Accuracy of the information contained. The properties of the products can vary due to various influences such as composition and condition of the Substrate, impurities in or on the substrate, temperature and humidity at the Change storage and environmental conditions during use. Using this product in combination with other material, the customer is responsible for to check through our own tests whether the product is suitable for the planned combination and whether this combination delivers the expected results

Tewipack Uhl GmbH
Industriestraße 15
D-75382 Althengstett

Telephone:
+49(0)7051/9297-0
Fax:
+49(0)7051/9297-99

E-Mail:
info@tewipack.de
Website:
www.tewipack.de

Managing director:
Alexander Uhl,
Michael Uhl
HRB 330424
Amtsgericht
Stuttgart

Bank details:
Sparkasse
Sindelfingen
Pforzheim
Calw
BLZ 666 500
85
Konto 17 787

Commerzbank
Sindelfingen
BLZ 603 400 71
Konto 8 001 166

Vereinigte
Volksbank AG
Böblingen
BLZ 603 900 00
Konto 80 089
003

Postbank
Stuttgart
BLZ 600 100
70
Konto 146
294 708

3M™ Scotch-Weld™

Structural Void Filling Compound

EC-3550 B/A FST

Technical Data Sheet

Introduction

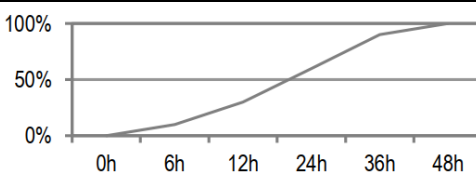
3M™ Scotch-Weld™ Structural Void Filling Compound 3550 B/A FST (Fire Smoke Toxicity) is a two-part, low-density, flame-retardant epoxy compound that can be stored, applied, and cured at room temperature. Scotch-Weld 3550 B/A FST Compound can be used for void-filling, edge-sealing, and complex gap-filling. The cured material has meets FAR 25.853 (a) (d) and offers excellent water and chemical resistance. It is designed for both metal and non metal honeycomb sandwich constructions which are typically found in aircraft interior structures such as galley structures, luggage bins, partition walls, lavatory structures, crew rest compartments, seating structures, ceiling panels, doghouses, sidewall panels, cargo bay panels, bar units, coatrooms and passenger doors. In these applications the Scotch-Weld 3550 B/A FST Compound is used for honeycomb sandwich structures as edge close-out, corner reinforcement, and local reinforcement for mechanical fixation or complex gap-filling.

Key advantages are:

- Extrudable through both cartridge and dispensing systems
- Meets FAR 25.853 (a) (d)
- 100 % solids, sag resistant material
- Full room temperature processing
- Paintable

Product Characteristics

NOTE: All technical data and information in this data sheet should be considered representative or typical only and should not be used for specification purposes.

General Properties	Part B	Part A
Colour	Brown with black spots	Off white
Base	Epoxy	Modified Amine
Typical Uncured Density	0.56 g/ccm	0.58 g/ccm
Mix Ratio by Volume (by weight)	100 (100)	50 (52)
Consistency	Thixotropic paste	
Solid content	100%	
Work life at 23 ± 2°C	≥ 2 hours in static mixer	
Time to form stability	~ 6 hours at 23 ± 2 °C	
Typical strength build-up at 23 ± 2 °C		
Full Cure cycle at 23 ± 2°C	48 hours	
Slump Resistance	~ 0.5mm	
Typical Cured Density	0.57 g/ccm	
Packaging	Cartridges and Pails	

Product Performance

The following product performance data was obtained under the conditions specified. All values are based on specimens extruded through a static mixer. Cure cycle was as follows: 48 hours at 23 ± 2 °C. The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Mechanical properties	Test temperature	Result
Compressive Strength ISO 604 12.5 x 12.5 x 25 mm ³ specimen	-55 ± 2 °C	30 MPa
	23 ± 2 °C	27 MPa
	80 ± 2 °C	5 MPa
Compressive Modulus ISO 604 12.5 x 12.5 x 25 mm ³ specimen	-55 ± 2 °C	550 MPa
	23 ± 2 °C	1200 MPa
	80 ± 2 °C	75 MPa
Shear Strength	23 ± 2 °C	2500 N

Flammability, Smoke Density and Toxic Gas Emission

FST properties have been measured in a standalone mode. Pure adhesive has been cured and tested in the dimensions specified.

Fire properties		Requirements	Results
Flammability - 12s vertical Bunsen burner FAR/JAR/CS 25.853(a), App. F Part. I §(a)(1)(ii) Sample size: 6,35 x 76 x 305 mm ³	Flame extinguishing time	≤ 3 s	0 s
	Burn length	≤ 203 mm	3 mm
	Drip flame time	≤ 15 s	0 s
Flammability - 60 s vertical Bunsen burner FAR/JAR/CS 25.853(a), App. F Part. I §(a)(1)(i) Sample size: 6,35 x 76 x 305 mm ³	Flame extinguishing time	≤ 3 s	0 s
	Burn length	≤ 150 mm	21 mm
	Drip flame time	≤ 15 s	0 s
Smoke density - flaming mode FAR/JAR/CS 25.853, App. F part V & AITM 2.0007 Sample size: 3,0 x 76 x 76 mm ³	DS _{max} ^(a) in 4 min	≤ 200	162
Toxic gas emission Airbus ABD0031 & AITM 3.0005 Sample size: 3,0 x 76 x 76 mm ³	HCN	≤ 150 ppm	33 ppm
	HF	≤ 100 ppm	< 1 ppm
	HCl	≤ 150 ppm	< 1 ppm
	SO ₂ + H ₂ S	≤ 100 ppm	< 1 ppm
	NO _x	≤ 100 ppm	9 ppm
	CO	≤ 1000 ppm	450 ppm

^(a) DS_{max}: maximum optical smoke density

Handling

Refer to product label and 3M Safety Data Sheet (SDS) for health and safety information before using this product. For SDS requirements, please visit our website www.3m.com/sds

Instructions for use

The following information is provided as a general application guide based on typical conditions and applications. However, it is recognized that no two applications are identical due to differing assemblies, methods of heat and pressure application, production equipment and other environmental factors. It is therefore suggested that experiments be run as per the application requirements to determine optimum conditions for your specific application and to determine suitability of product for the intended use.

Surface Preparation

A thoroughly cleaned, dry, grease-free surface is essential for maximum performance. For repeatable results, the material and the substrates should be in the range of 20–25 °C (object temperature).

Application

This product consists of two parts. Mix Part B and Part A thoroughly manually or automatically by weight or volume in the proportions specified on the product. Mix manually approximately 15 seconds after a uniform colour is obtained. For semi-or full-automatic applications it is recommended to use either MC 13-12, or MBLT14-12 T static mixer for optimum extrusion rate. NOTE: The static mixer is linked to the packaging system. Please contact your sales representative for more details. For repeatable performance keep mixing ratio in a range of $\pm 5\%$. Duo-pack cartridge configurations allow for maximum accuracy and easy handling. When using a new mixer, scrap the first ccm's until a uniform colour is obtained. The work life of mixed material is around 2 hours.

CAUTION: Work life differs according to pot size and temperature. Larger sizes and higher temperatures create faster reaction times. Use a spatula to form the applied material in custom designed shape.

Curing

Cure the product at room temperature or with mild heat. NOTE: Higher temperatures generate faster curing times and can expand the product. The following times and temperatures will result in a full cure:

- 2 days at $23 \pm 2^\circ\text{C}$
- 1 hour at $80 \pm 2^\circ\text{C}$

Important: Be careful when curing larger quantities at elevated temperature because exothermic reaction may occur. Finish the shape mechanically earliest 12hours after mixing, e.g. abrasive, or milling. This product is paintable.

Cleaning

Excess uncured void filler can be cleaned with ketone type solvents. After cure, the adhesive can be removed mechanically. NOTE: When using solvents, extinguish all ignition sources, including pilot lights, and follow the manufacturer's precautions and instructions for use.

Storage

Store the product at room temperature or below. Shelf life is minimum 12 months from date of shipment in the original unopened packaging.

Technical Information: The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third-party intellectual property rights is granted or implied with this information.

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.



Automotive and Aerospace Solutions Division
www.3m.com/aerospace

Issue date: 01/2022

Reference: 258

3M and Scotch-Weld are
trademarks of 3M Company.
© 3M 2022. All rights reserved.