

Technical data sheet



Product: TA4230

Manufacturer: PERMABOND ENGINEERING ADHESIVES

Product group: KLEBSTOFF

Article group: 2-K KLEBSTOFF

Download: 02.05.2024

PERMABOND TA4230

This data sheet was provided to you by Tewipack Uhl GmbH. The company tewipack Uhl GmbH assumes no responsibility for the topicality and the Accuracy of the information contained. The properties of the products can vary due to various influences such as composition and condition of the Substrate, impurities in or on the substrate, temperature and humidity at the Change storage and environmental conditions during use. Using this product in combination with other material, the customer is responsible for to check through our own tests whether the product is suitable for the planned combination and whether this combination delivers the expected results

Tewipack Uhl GmbH
Industriestraße 15
D-75382 Althengstett

Telephone:
+49(0)7051/9297-0
Fax:
+49(0)7051/9297-99

E-Mail:
info@tewipack.de
Website:
www.tewipack.de

Managing director:
Alexander Uhl,
Michael Uhl
HRB 330424
Amtsgericht
Stuttgart

Bank details:
Sparkasse
Sindelfingen
Pforzheim
Calw
BLZ 666 500
85
Konto 17 787

Commerzbank
Sindelfingen
BLZ 603 400 71
Konto 8 001 166

Vereinigte
Volksbank AG
Böblingen
BLZ 603 900 00
Konto 80 089
003

Postbank
Stuttgart
BLZ 600 100
70
Konto 146
294 708

Features & Benefits

- Adhesion to a wide variety of substrates
- Fast cure at room temperature
- High shear and peel strength
- Good impact strength
- Designed to meet the requirements of UL94 V-0

Description

PERMABOND® TA4230 is a 2-part, 1:1 toughened acrylic adhesive. It can be used to bond a wide variety of materials including metals, plastics, composites, ceramics, and other substrates. The adhesive can provide excellent shear strength on many substrates with little surface preparation. The cured adhesive has been designed to meet the fire retardancy requirements of UL94 V-0.

Physical Properties of Uncured Adhesive

	TA4230 A-side	TA4230 B-side
Chemical composition	Methyl methacrylate	Methyl methacrylate
Colour	Cream	Yellow
Mixed colour	Straw	
Viscosity @ 25°C	8000 mPa.s (<i>cP</i>)	700 mPa.s (<i>cP</i>)
Specific gravity	1.14	1.0

Typical Curing Properties

Ratio of use	1 : 1
Maximum gap fill	0.5 mm (<i>0.02 in</i>)
Gel time (4g mix) @23°C	3 - 8 minutes
Handling time (0.3 N/mm ² shear strength is achieved) @23°C	10 - 20 minutes
Working strength @23°C	25 - 35 minutes
Full cure @23°C	24 hours


Typical Performance of Cured Adhesive

Shear strength* (ISO4587)	Aluminium: 25-30 N/mm ² (<i>3625-4351 psi</i>)
	Mild steel: 23-28 N/mm ² (<i>3335-4061 psi</i>)
	Stainless steel: 27-32 N/mm ² (<i>3916-4641 psi</i>)
	Hot dip galv steel: 16-20 N/mm ² (<i>2320-2900 psi</i>)
	Carbon fibre: 12-16 N/mm ² (<i>1740-2320 psi</i>)
	Epoxy FRP: 7-11 N/mm ² (<i>1015-1595 psi</i>) SF*
	PMMA: >6 N/mm ² (<i>>870 psi</i>) SF*
	Polycarbonate: >4 N/mm ² (<i>>580 psi</i>) SF*
	PVC: >6 N/mm ² (<i>>870 psi</i>) SF*
	ABS : >5 N/mm ² (<i>>725 psi</i>) SF*
Peel strength (ISO11339)	100-200 N/25mm (<i>23-46 PIW</i>)
Hardness (ISO868)	80-85 Shore D
Thermal conductivity	0.28 W/(m.K)

*Strength results will vary depending on the level of surface preparation and gap. If using a cleaning solvent, allow 3-4 minutes to fully evaporate before applying adhesive. Figures above were on degreased-only substrates.

SF* = Substrate failure

Hot Strength

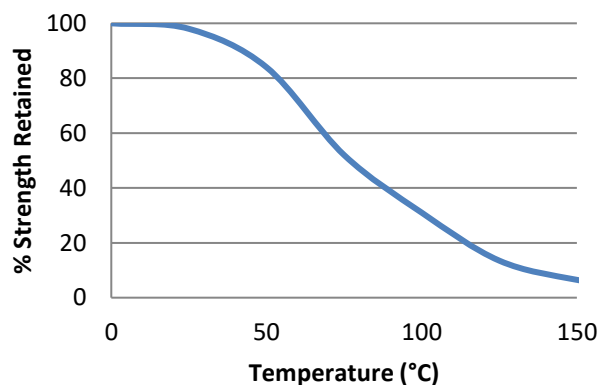

"Hot strength" shear strength tests performed on mild steel. Fully cured specimens conditioned to pull temperature for 30 minutes before testing at temperature.

TA4230 can withstand higher temperatures for brief periods (such as for paint baking and wave soldering processes) providing the joint is not unduly stressed. The minimum temperature the cured adhesive can be exposed to is -40°C (-40°F) depending on the materials being bonded.

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.

Additional Information

This product is not recommended for use in contact with strong oxidizing materials. This product may affect some thermoplastics and users must check compatibility of the product with such substrates.

Information regarding the safe handling of this material may be obtained from the safety data sheet (SDS). Users are reminded that all materials, whether innocuous or not, should be handled in accordance with the principles of good industrial hygiene.

This Technical Datasheet (TDS) offers guideline information and does not constitute a specification.

Storage & Handling

Storage Temperature	2 to 25°C (35 to 77°F)*
---------------------	-------------------------

*Room temperature storage may increase the cure time of the adhesive. For best results on zinc alloys, store at 2 to 7°C.

Surface Preparation

Surfaces should be clean, dry and grease-free before applying the adhesive. Permabond Cleaner A is recommended for the degreasing of most surfaces. Some metals such as aluminium, copper and its alloys will benefit from light abrasion with emery cloth (or similar), to remove the oxide layer.

Directions for Use

- 1) Surfaces must be clean, dry and grease-free. If using a cleaning solvent, allow 3-4 minutes to fully evaporate before applying adhesive.
- 2) Apply a thin bead of adhesive pre-mixed through a static mixer nozzle.
- 3) Alternatively apply a thin layer of resin on one component and hardener on the other.
- 4) Assemble components and clamp.
- 5) Maintain pressure until handling strength is achieved. The time required will vary according to the joint design and surfaces being bonded.
- 6) Allow 24 hours for adhesive to fully cure. Accelerated cure times may be achieved by heating.

Video Links

Surface preparation:

<https://youtu.be/8CMOMP7hXiU>

Structural acrylic directions for use:

<https://youtu.be/edvBe4iYNCY>



www.permabond.co.uk

www.permabond.com

• UK: 0800 975 9800

• General Enquiries: +44 (0)1962 711661

• US: 732-868-1372

• Asia: + 86 21 5773 4913

info.europe@permabond.com

info.americas@permabond.com

info.asia@permabond.com

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.