

# Technical data sheet



Product: 2999

Manufacturer: H.B. FULLER

Product group: KLEBSTOFF

Article group: CYANACRYLAT

Download: 17.05.2024

## CYBERBOND CB 2999

This data sheet was provided to you by Tewipack Uhl GmbH. The company tewipack Uhl GmbH assumes no responsibility for the topicality and the Accuracy of the information contained. The properties of the products can vary due to various influences such as composition and condition of the Substrate, impurities in or on the substrate, temperature and humidity at the Change storage and environmental conditions during use. Using this product in combination with other material, the customer is responsible for to check through our own tests whether the product is suitable for the planned combination and whether this combination delivers the expected results

Tewipack Uhl GmbH  
Industriestraße 15  
D-75382 Althengstett

Telephone:  
+49(0)7051/9297-0  
Fax:  
+49(0)7051/9297-99

E-Mail:  
info@tewipack.de  
Website:  
www.tewipack.de

Managing director:  
Alexander Uhl,  
Michael Uhl  
HRB 330424  
Amtsgericht  
Stuttgart

Bank details:  
Sparkasse  
Sindelfingen  
Pforzheim  
Calw  
BLZ 666 500  
85  
Konto 17 787

Commerzbank  
Sindelfingen  
BLZ 603 400 71  
Konto 8 001 166

Vereinigte  
Volksbank AG  
Böblingen  
BLZ 603 900 00  
Konto 80 089  
003

Postbank  
Stuttgart  
BLZ 600 100  
70  
Konto 146  
294 708



### CB 2999

### Technical Datasheet

#### Neomer Series

- fast bonding
- very high viscosity
- surface insensitive

The Neomer Series stands for the so called surface insensitive Cyanoacrylates. These products perform very well on most materials including acid surfaces such as wood, leather, cardboard, paper etc. CB 2999 is a thixotropic product or also called Gel, meaning that once applied the adhesive will stand even on vertical surfaces. In addition it has got very good gap filling properties.

#### Physical properties - monomer (uncured)


Base compound	Ethyl-2-cyanoacrylate
Appearance	colourless, transparent
Density at 20 °C in g/cm <sup>3</sup>	1,08
Flashpoint	80
Shelf life, 20 °C, unopened, in months	12

#### Viscosity

cone-plate, @20 °C

@ 0.5 rpm 35000 - 60000 cps

@ 160 rpm 3000 - 6000 cps

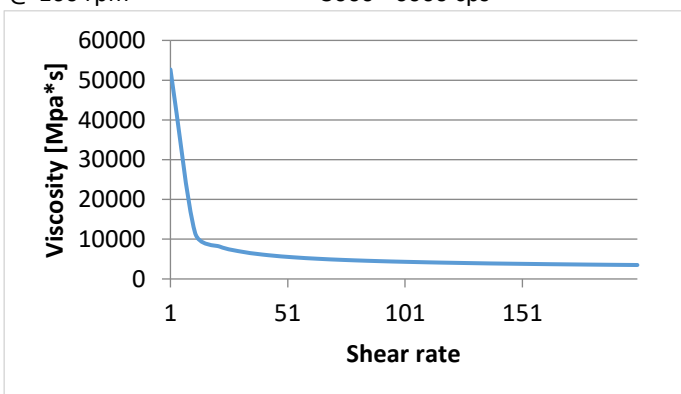

#### Physical properties - Polymer

Appearance	transparent
Service temp range	-55 - 95 °C


#### Setting time [seconds]

metal (stahl)	45 - 120
EPDM	5 - 10
plastic (ABS)	13 - 15
wood (beech)	80 - 120

#### strength of cured adhesive

Substrate	N/mm <sup>2</sup>
NBR-rubber ▲	5 to 12
steel	8 to 17

▲ material failure

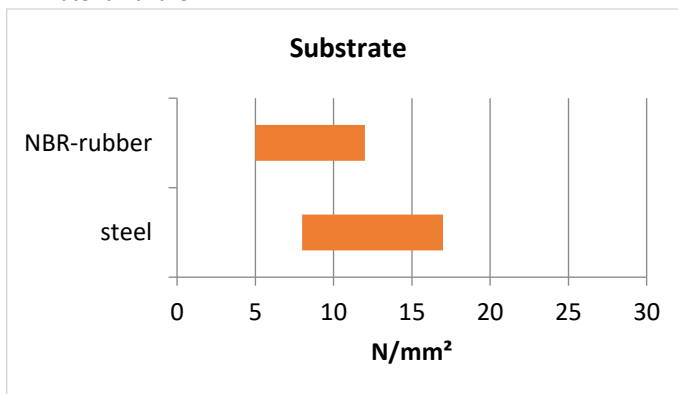

#### Specification


ISO 10993-5: Test for in vitro cytotoxicity (biocompatibility).

RoHS conform.


For details and certificates see [www.Cyberbond.eu](http://www.Cyberbond.eu)

## Hot Strength on steel


% of RT strength, tested at temperature

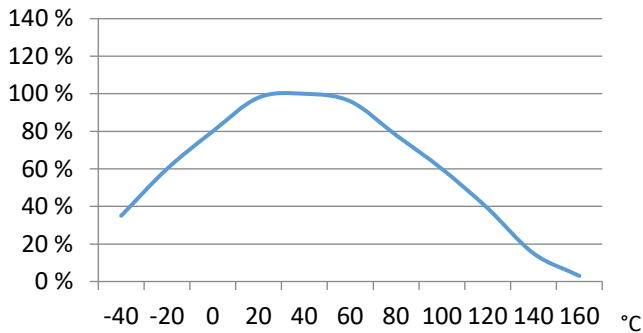

## Time Until Full Cure % of RT strength

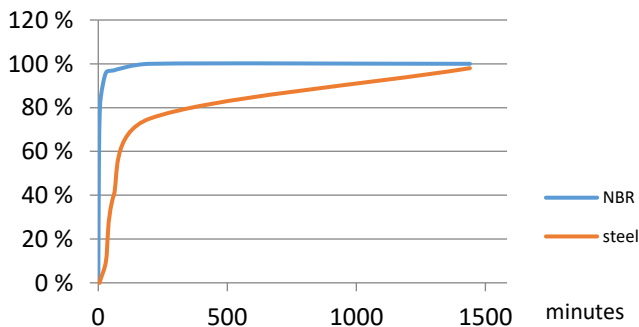

## Heat Aging - on steel tested @20 °C

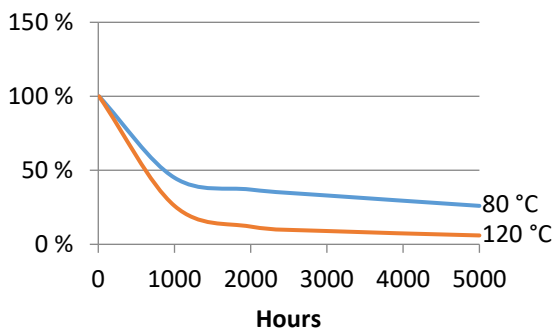

## Durability after Alternating Climate Storage

Conditions; tested with stainless steel

above freeze point 80% rel. humidity

temperature range: -20 - 80 °C

Cycle count

60

[h]

Holding time at start temperature

0

Heating up phase

3

Keeping warm phase


3

Cooling down phase

3

Holding time at final temperature

3

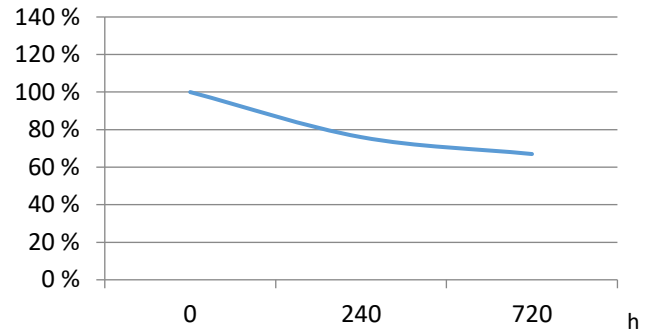

## Solvent resistance

Solvent	Example	Resistance
alcohol	ethanol, methanol	+++
ester (aliphatic)	ethyl acetate (acetic acid ethyl ester)	---
ketones	acetone, benzophenone	---
aliphatic hydrocarbons (alkanes)	petrol, heptane, hexane	++
aromatic hydrocarbons	benzene, toluene, xylene	++
halogenated hydrocarbons	methylene chloride, chloroform, chlorobenzene	---
weak aqueous acids	diluted nitric-, muriatic-, sulfuric-, phosphoric acid	+++
concentrated acid	nitric acid, muriatic acid, sulfuric acid, phosphoric acid	---
weak aqueous bases	diluted sodium hydroxide -, caustic potash solution	+++
concentrated bases	sodium hydroxide -, caustic potash solution	---
water		++
iso-propanol		+++
acetone		---
mineral oil		++

+++ very good ++ good --- very bad

## General Information CA

Cyanoacrylates are fast setting, one component and solvent free adhesives. They are based on esters of cyanoacetic acid. To get to a finished product, mainly thickeners, respectively film forming agents (polymer methacrylics and acrylics) and stabilisers are added. The polymerization is initiated by present humidity. Best results are given between 40 to 70 % relative humidity.

Cyberbond standard grades are as follows:

- Powerdrop series (stabilised ethyl ester)
- Elastomer and plastic series (ethyl ester)
- Neomer Series (surface insensitive ethyl ester)
- xtraflex series (rubber toughened ethyl ester)
- metal series (ethyl ester)
- low odour series (alkoxy ester)
- medical series (butyl- and octyl ester)

## Measurement of Viscosities

Viscosity describes the flow-ability of a liquid. Cyberbond measures the viscosity of the products by means of the cone/plate method: the liquid is applied on a panel and a defined cone presses the liquid together and rotates.

You differentiate between a Newtonian and a thixotropic liquid. In terms of a Newtonian liquid you will get a relative constant viscosity graph in dependence of the rotary speed of the cone. In terms of thixotropic liquids the product becomes more liquid (down to its base viscosity) the faster the cone rotates.

The viscosity is measured in mPa\*s (milli Pascal x second) [SI system] or in cP (centipoise) [CGS- system]; 1 mPa\*s = 1 cP.

In order to allow products comparison all adhesives are measured at the same rotation speeds.

- Newtonian liquids at 160 rpm
- Thixotropic liquids at 0,5 rpm and at 160 rpm

Temperature always is at 20 °C / 68 °F, if not mentioned to be different.

## Clean Surface

The surface condition of the mating parts has an enormous influence on the success of a bond. To achieve good bonding success the mating parts should be clean.

## Additional Programme

In order to support certain applications Cyberbond offers perfectly balanced additional products such as:

- Primer and Conditioner Pen: in order to change surface tension; enables to bond unpolare materials (Standard: CB 9056)
- D-Bonder: in order to dissolve adhesives (Standard: CB 9060, CB 9065, CB 9066)
- Activator: in order to accelerate the curing of adhesives (Standard: CB 9090, CB 9096, Quickstep 9040, Quickstep 9080)
- Cleaner: in order to clean surfaces professionally (Standard: CB 9099)

## LINOP Equipment

Cyberbond offers by means of the LINOP Equipment range suitable dosing and LED based curing devices. We also refer to suitable dosing tips which help an economical use of the adhesives (also if used manually).

## Storage

Store products in a cold and dark place. Before use allow to reach ambient temperature.

## Potential Danger of Cyanoacrylates

You should care for the following:

- use in well ventilated areas only
- install suitable exhaust systems in the workshop
- apply material economically and use a dosing system where appropriate
- allow a consistent relative humidity of 50 to 65 %; with regards to lower figures the polymerization will be delayed and monomer adhesive fume will appear
- if necessary: wear suitable, non-sucking gloves (e.g. no cotton)
- keep adhesive out of reach of children

The data mentioned in this TDS, particularly the recommendations and use of products are based on our recent knowledge and experience. Due to the fact of having so many different materials involved and conditions of applications which are out of our influence, we strongly recommend to do sufficient tests in order to guarantee that Cyberbond products are suitable for the intended process and applications. Except for wilful acts any liability based on such recommendations or any verbal advice is hereby expressly excluded.

## For safe handling consult Material Safety Data Sheet (MSDS).

Cyberbond Europe GmbH

A H.B. Fuller Company

Werner-von-Siemens-Straße 2

31515 Wunstorf

Germany

Tel.: +49 / 50 31 / 95 66 - 0

www.cyberbond.de



H.B. Fuller

Cyberbond CB