

# Technical data sheet



Product: ET5429

Manufacturer: PERMABOND ENGINEERING ADHESIVES

Product group: KLEBSTOFF

Article group: 2-K KLEBSTOFF

Download: 03.05.2024

## PERMABOND® ET5429

This data sheet was provided to you by Tewipack Uhl GmbH. The company tewipack Uhl GmbH assumes no responsibility for the topicality and the Accuracy of the information contained. The properties of the products can vary due to various influences such as composition and condition of the Substrate, impurities in or on the substrate, temperature and humidity at the Change storage and environmental conditions during use. Using this product in combination with other material, the customer is responsible for to check through our own tests whether the product is suitable for the planned combination and whether this combination delivers the expected results

Tewipack Uhl GmbH  
Industriestraße 15  
D-75382 Althengstett

Telephone:  
+49(0)7051/9297-0  
Fax:  
+49(0)7051/9297-99

E-Mail:  
info@tewipack.de  
Website:  
www.tewipack.de

Managing director:  
Alexander Uhl,  
Michael Uhl  
HRB 330424  
Amtsgericht  
Stuttgart

Bank details:  
Sparkasse  
Sindelfingen  
Pforzheim  
Calw  
BLZ 666 500  
85  
Konto 17 787

Commerzbank  
Sindelfingen  
BLZ 603 400 71  
Konto 8 001 166

Vereinigte  
Volksbank AG  
Böblingen  
BLZ 603 900 00  
Konto 80 089  
003

Postbank  
Stuttgart  
BLZ 600 100  
70  
Konto 146  
294 708

## Features & Benefits

- 💧 Ideal for bonding composite materials
- 💧 Easy to apply
- 💧 High shear and peel strength
- 💧 Good impact strength
- 💧 High temperature resistance

## Description

**PERMABOND® ET5429** is a thixotropic two-part adhesive with excellent resistance to impact and vibration. The controlled flow properties as well as its ease of mixing and application, enables the adhesive to be used where gap filling or vertical application is required. Permabond® ET5429 has been found to provide exceptional performance even at elevated temperatures. It is ideal for use in construction of composite assemblies.

## Physical Properties of Uncured Adhesive

	ET5429 A side	ET5429 B side
Chemical composition	Epoxy Resin	Polyamine Hardener
Appearance	White	Black
Mixed appearance	Charcoal black	
Viscosity @ 25°C	20rpm: 200,000 mPa.s (cP)	20rpm: 60,000 mPa.s (cP)
	2rpm: 300,000 mPa.s (cP)	2rpm: 150,000 mPa.s (cP)
Specific gravity	1.0	1.0

## Typical Curing Properties

Mix ratio	2:1 by volume 2:1 by weight
Maximum gap fill	5 mm <b>0.2 in</b>
Usable / pot life @23°C 10g mixed	2-4 hours
Handling time	23°C: 6-10 hours
Working strength	23°C: 24 hours 60°C: 1 hour
Full cure	23°C: 72 hours 60°C: 2 hours

## Typical Performance of Cured Adhesive

Shear strength* (ISO4587)	Mild Steel: 23-28 N/mm <sup>2</sup> ( <b>3335-4060psi</b> )
	Aluminium: 26-31 N/mm <sup>2</sup> ( <b>3770-4495psi</b> )
	Stainless Steel: 25-30 N/mm <sup>2</sup> ( <b>3625-4350psi</b> )
	Carbon Fibre: >25 N/mm <sup>2</sup> ** SF ( <b>&gt;3625psi</b> )
	FRP Glass/Polyester: >6 N/mm <sup>2</sup> ** SF ( <b>&gt;870psi</b> )
	FRP Glass/Epoxy: 18-22 N/mm <sup>2</sup> ( <b>2610-3190psi</b> )
	PEEK: 4-5 N/mm <sup>2</sup> ( <b>580-725psi</b> )
	PA6 30% filled: 4-6 N/mm <sup>2</sup> ( <b>580-870psi</b> )
	PVC: >3 N/mm <sup>2</sup> ** SF ( <b>&gt;435psi</b> )
	Polycarbonate: 3-4 N/mm <sup>2</sup> ( <b>435-580psi</b> )
Peel strength (aluminium) (ISO4578)	150-230 N/25mm ( <b>33-51 PIW</b> )
Impact strength (ASTM D-950)	30-40 KJ/m <sup>2</sup>
Hardness (ISO868)	65-75 Shore D
Elongation at break (ISO37)	<5%
Glass transition temperature Tg	50-60°C ( <b>122-140°F</b> )
Dielectric strength	15-25 kV/ mm


\*Strength results will vary depending on the level of surface preparation and gap.

\*\*SF Denotes substrate failure

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.


No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.

## Strength Development

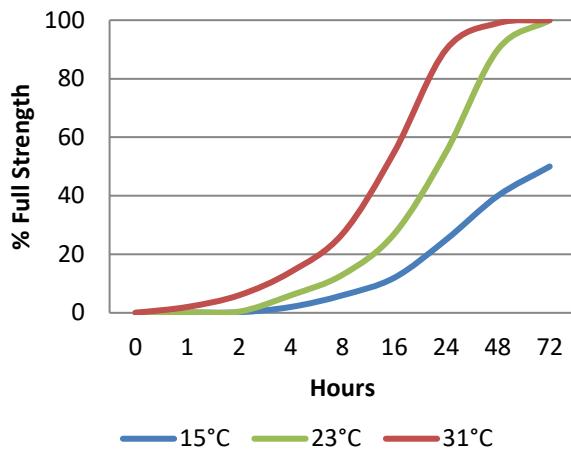

Graph shows typical strength development of bonded components. An increase of 8°C in temperature will halve the cure time. Lower temperatures will result in a slower cure time.

## Hot Strength

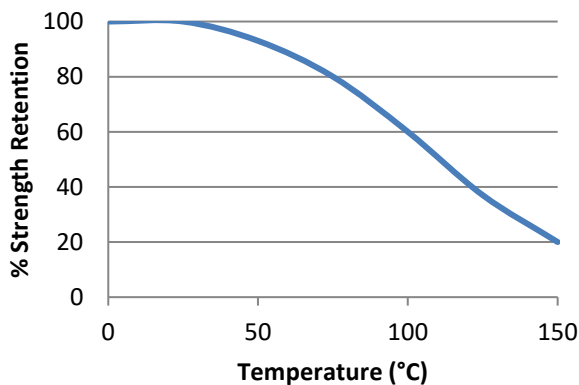

"Hot strength" shear strength tests performed on mild steel. Fully cured specimens conditioned to pull temperature for 30 minutes before testing at temperature. ET5429 can withstand higher temperatures for brief periods (such as for paint baking and wave soldering processes) providing the joint is not unduly stressed. The minimum temperature the cured adhesive can be exposed to is -40°C (-40°F) depending on the materials being bonded.

## Additional Information

This product is not recommended for use in contact with strong oxidizing materials.

Information regarding the safe handling of this material may be obtained from the safety data sheet.

Users are reminded that all materials, whether innocuous or not, should be handled in accordance with the principles of good industrial hygiene.

**This Technical Datasheet (TDS) offers guideline information and does not constitute a specification.**

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.

PermaBond ET5429

Global TDS Revision 7

12 May 2022

Page 2/2

**FOR PROFESSIONAL OR INDUSTRIAL USE ONLY. KEEP OUT OF REACH OF CHILDREN**

## Surface Preparation

Surfaces should be clean, dry and grease-free before applying the adhesive. Use a suitable solvent (such as acetone or isopropanol) for the degreasing of surfaces. Some metals such as aluminium, copper and its alloys will benefit from light abrasion with emery cloth (or similar), to remove the oxide layer.

## Directions for Use

1. Dual cartridges:
  - a) Insert the cartridge into the application gun and guide the plunger into the cartridge.
  - b) Remove the cartridge cap and dispense material until both sides are flowing.
  - c) Attach the static mixer to the end of the cartridge and begin dispensing the material.
2. Apply material to one of the substrates.
3. Join the parts. Parts must be joined within the usable pot life of mixing the two epoxy components.
4. Large quantities and/or higher temperature will decrease the usable life or pot life.
5. Apply pressure to the assembly by clamping until handling strength is obtained.
6. Full cure will be obtained after 72 hours at 23°C (73°F). Heat can be used to accelerate the curing process.

## Video Links

Surface preparation:

<https://youtu.be/8CMOMP7hXjU>

Two-part epoxy directions for use:

<https://youtu.be/GRX1RyknYqc>



## Storage & Handling

Storage Temperature	5 to 25°C (41 to 77°F)
---------------------	------------------------

[www.permabond.com](http://www.permabond.com)

• UK: 0800 975 9800

• General Enquiries: +44 (0)1962 711661

• US: 732-868-1372

• Asia: + 86 21 5773 4913

[info.europe@permabond.com](mailto:info.europe@permabond.com)

[info.americas@permabond.com](mailto:info.americas@permabond.com)

[info.asia@permabond.com](mailto:info.asia@permabond.com)