

Technical data sheet



Product: FLEXOMOUNT

Manufacturer: 3M DEUTSCHLAND GMBH

Product group: KLEBEBAND

Article group: EINSEITIG

Download: 31.08.2025

447DL,411DL,412DL413DL,414DL

This data sheet was provided to you by Tewipack Uhl GmbH. The company tewipack Uhl GmbH assumes no responsibility for the topicality and the Accuracy of the information contained. The properties of the products can vary due to various influences such as composition and condition of the Substrate, impurities in or on the substrate, temperature and humidity at the Change storage and environmental conditions during use. Using this product in combination with other material, the customer is responsible for to check through our own tests whether the product is suitable for the planned combination and whether this combination delivers the expected results

Tewipack Uhl GmbH
Industriestraße 15
D-75382 Althengstett

Telephone:
+49(0)7051/9297-0
Fax:
+49(0)7051/9297-99

E-Mail:
info@tewipack.de
Website:
www.tewipack.de

Managing director:
Alexander Uhl,
Michael Uhl
HRB 330424
Amtsgericht
Stuttgart

Bank details:
Sparkasse
Sindelfingen
Pforzheim
Calw
BLZ 666 500
85
Konto 17 787

Commerzbank
Sindelfingen
BLZ 603 400 71
Konto 8 001 166

Vereinigte
Volksbank AG
Böblingen
BLZ 603 900 00
Konto 80 089
003

Postbank
Stuttgart
BLZ 600 100
70
Konto 146
294 708



Plate Mounting Systems

Flexomount™ Solid Printing Tape

Cushion-Mount™ Solid Printing Tape

Flexographic Systems

FOD# 1588

page 1 of 6

Technical Data

February 1, 1999

Product Description

3M™ Flexographic Solid Printing tapes are double-coated tapes designed for mounting photopolymer and rubber printing plates to flexographic printing cylinders or sleeve systems. The adhesive systems are specifically formulated for clean removability from both the plate and the print cylinder.

The Flexomount solid vinyl carrier is designed for printing solids and line work. The Cushion Mount elastomeric foam carrier is designed for solid and line printing.

Product	Thickness*		Description
Flexomount™ Solid Printing Foam Tapes			
447DL 411DL 412DL	0.010 in. 0.015 in. 0.020 in.	0.25mm 0.38mm 0.50mm	Gray double coated tape with a soft rubber adhesive on each side of a vinyl carrier. Available in double or single liner.
	0.020 in.	0.50mm	
413DL 414DL	0.015 in. 0.020 in.	0.38 mm 0.50 mm	
Cushion Mount™ Solid Printing Tapes			
929 933 939	0.060 in. 0.015 in. 0.020 in.	1.52 mm 0.38 mm 0.50 mm	Rubber adhesive on each side of a tan high density elastomeric foam.
949	0.020 in.	0.50 mm	
			Differential adhesive system on a tan high density elastomeric foam. Non-liner side: rubber resin adhesive. Liner side: acrylic adhesive.

*All thicknesses are nominal performance thicknesses for which the products are targeted to perform during the flexographic printing operation.

3M™ Plate Mounting Systems

Flexomount™ Solid Printing Tape

Cushion-Mount™ Solid Printing Tape

Flexographic Systems

FOD# 1588

page 2 of 6

Typical Physical Properties and Performance Characteristics

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

	Flexomount™ Solid Printing Tapes					Cushion-Mount™ Solid Printing Tapes				
Product	411DL	412DL	413DL	414DL	447DL	929	933	939	949	
Adhesive	Rubber Soft	Rubber Soft	Rubber Firm	Rubber Firm	Rubber Soft	Rubber	Rubber	Rubber	Rubber/Acrylic	
Carrier	Solid Vinyl (Gray)	Solid Vinyl (Gray)	Solid Vinyl (Black)	Solid Vinyl (Black)	Solid Vinyl (Gray)	Elastomeric Foam (Tan)	Elastomeric Foam (Tan)	Elastomeric Foam (Tan)	Elastomeric Foam (Tan)	
Type of Printing	Solid and Line	Solid and Line	Solid and Line	Solid and Line	Solid and Line	Solid and Line	Solid and Line	Solid and Line	Solid and Line	
Type of Plate	Rubber & Photopolymer	Rubber & Photopolymer	Rubber & Photopolymer	Rubber & Photopolymer	Rubber & Photopolymer	Photopolymer	Photopolymer	Photopolymer	Rubber	
Thickness Tape	in. (mm)	±0.015 (0.381)	0.020 (0.508)	0.015 (0.381)	0.020 (0.508)	0.010 (0.254)	0.062 (1.575)	0.017 (0.432)	0.022 (0.599)	0.022 (0.599)
Paper Liner	in. (mm)	0.004 (0.102)	0.004 (0.102)	0.004 (0.102)	0.004 (0.102)	0.004 (0.102)	0.004 (0.102)	0.004 (0.102)	0.004 (0.102)	0.004 (0.102)
Poly Liner	in. (mm)	0.004 (0.102)	0.004 (0.102)	0.004 (0.102)	0.004 (0.102)	0.004 (0.102)	NA	NA	NA	NA
Lot to Lot Tolerance	in. (mm)	± 0.0015 (± 0.038)	± 0.0015 (± 0.038)	± 0.0015 (± 0.038)	± 0.0015 (± 0.038)	± 0.0015 (± 0.038)	± 0.0015 (± 0.038)	± 0.0015 (± 0.038)	± 0.0015 (± 0.038)	± 0.0015 (± 0.038)
Typical Application Area Caliper Variation*	in. (mm)	± 0.0006 (± 0.015)	± 0.0006 (± 0.015)	± 0.0006 (± 0.015)	± 0.0006 (± 0.015)	± 0.0006 (± 0.015)	± 0.0008 (± 0.021)	± 0.0007 (± 0.018)	± 0.0007 (± 0.018)	± 0.0007 (± 0.018)
Roll Length	yd. (m)	36 (32.9)	36 (32.9)	36 (32.9)	36 (32.9)	36 (32.9)	50 ft. (15.2)	25 (22.9)	25 (22.9)	25 (22.9)
Master Width	in. (mm)	36 (914.4)	36 (914.4)	36 (914.4)	36 (914.4)	36 (914.4)	36 (914.4)	36 (914.4)	36 (914.4)	36 (914.4)
Slitting Tolerance	in. (mm)	± 1/32 (± 0.795)	± 1/32 (± 0.795)	± 1/32 (± 0.795)	± 1/32 (± 0.795)	± 1/32 (± 0.795)	± 1/32 (± 0.795)	± 1/32 (± 0.795)	± 1/32 (± 0.795)	± 1/32 (± 0.795)
Shelf Life (months)		12	12	12	12	12	12	12	12	12

*Typical application area is 18 in. x 6 ft. = 1 square yard, 457.2 mm x 1828.8 mm = 0.8361 m² Caliper variation defined as ± 2 standard deviations.

3M™ Plate Mounting Systems
Flexomount™ Solid Printing Tape
Cushion-Mount™ Solid Printing Tape
Flexographic Systems

FOD# 1588
page 3 of 6

Typical Physical Properties and Performance Characteristics cont.

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Product	Flexomount™ Solid Printing Tapes					Cushion-Mount™ Solid Printing Tapes			
	411DL	412DL	413DL	414DL	447DL	929	933	939	949
Density									
lb/ft³ (kg/m³)	70 (1060)	70 (1060)	70 (1060)	70 (1060)	70 (1060)	50 (750)	50 (750)	50 (750)	50 (750)
Compression Deflection									
10% Compression lb/in² (kPa)	N/A	N/A	N/A	N/A	N/A	40 (275)	40 (275)	40 (275)	40 (275)
25% Compression lb/in² (kPa)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Peel Adhesion ASTM-D3330									
Stainless Steel oz/in (N/100mm)	50 (55)	50 (55)	40 (44)	40 (44)	50 (55)	20 (22)	20 (22)	20 (22)	20 (22)
Composite Sleeve oz/in (N/100mm)	30 (33)	30 (33)	25 (27)	25 (27)	30 (33)	15 (16)	15 (16)	15 (16)	15 (16)
Photopolymer oz/in (N/100mm)	40 (44)	40 (44)	30 (33)	30 (33)	40 (44)	30 (33)	30 (33)	30 (33)	N/A
Rubber oz/in (N/100mm)	50 (55)	50 (55)	50 (55)	50 (55)	50 (55)	N/A	N/A	N/A	30 (33)
Solvent Resistance									
Water	Excellent	Excellent	Excellent	Excellent	Excellent	Excellent	Excellent	Excellent	Excellent
Alkanes	Good	Good	Good	Good	Good	Good	Good	Good	Good
Alcohols	Fair	Fair	Good	Good	Fair	Fair	Fair	Fair	Fair
Acetates	Poor	Poor	Poor	Poor	Poor	Poor	Poor	Poor	Poor
Heat Resistance									
°F (°C)	120 (49)	120 (49)	130 (54)	130 (54)	130 (49)	120 (49)	120 (49)	120 (49)	120 (49)

3M™ Plate Mounting Systems

Flexomount™ Solid Printing Tape

Cushion-Mount™ Solid Printing Tape

Flexographic Systems

FOD# 1588

page 4 of 6

Product Selection Considerations

		Type of Printing		Type of Printing	
		Solids and Line printing where maximum ink density is critical		Solids and Line printing where crisp type and reverse are critical	
Plate Type	Thickness	High Plate Side Adhesion	Medium Plate Side Adhesion	High Plate Side Adhesion	Medium Plate Side Adhesion
Photopolymer	0.010 in. (0.25 mm)	447DL			
	0.015 in. (0.38 mm)	411DL	413DL		933
	0.020 in. (0.50 mm)	412DL	414DL		939
	0.060 in. (1.52 mm)				929
Rubber	0.010 in. (0.25 mm)	447DL			
	0.015 in. (0.38 mm)	411DL 413DL			
	0.020 in. (0.50 mm)	412DL 414DL			949

There are four general considerations for selecting the right mounting tape: the thickness of the tape, the type of printing plate, the adhesion properties and the type of printing.

• Tape Thickness:

The Flexomount and Cushion-Mount Solid Printing Tape products range in thickness in order to meet undercut or pitch diameters that are common on flexographic printing presses. Tapes are available for 10, 15, 20 and 60 mil (0.25, 0.38, 0.50 and 1.52 mm) applications.

• Type of Printing Plate:

The adhesive systems on each tape have been developed for bonding to photopolymer or rubber printing plates. Some tapes are developed to be used specifically for photopolymer or rubber, since the composition and backside surface properties of these two plates are extremely different.

• Adhesion Properties:

Flexomount Gray and Black Adhesives

Flexomount Solid Printing tapes come in two different adhesion levels: standard (gray) and repositionable (black).

411DL, 412DL and 447DL come with the standard adhesive. These products have excellent adhesion to both rubber and photopolymer plates. The high adhesion makes it a good choice for long runs and helps reduce the tendency for plate edge lifting. 413DL and 414DL come with a firmer adhesive which provides easier plate repositioning and higher temperature and solvent resistance.

Cushion Mount Adhesives

The Cushion Mount products have two different plate side adhesives available. 933, 939 and 929 are designed for use with photopolymer plates with a medium level of adhesion. 949 is designed for use with rubber plates and also has a medium level of adhesion.

3M™ Plate Mounting Systems

Flexomount™ Solid Printing Tape

Cushion-Mount™ Solid Printing Tape

Flexographic Systems

FOD# 1588
page 5 of 6

Product Selection Considerations cont.

• Type of Printing:

The Flexomount and Cushion-Mount product lines use different vinyl or foam carriers which are designed for specific printing requirements. 3M Solid Printing Tapes offer two different carrier types to meet print needs from solids and basic lines to high quality line work.

Flexomount™ Tapes (411DL, 412DL, 413DL, 414DL, 447DL)

The solid vinyl Flexomount products are designed for solid and line work. The non-compressible vinyl carrier provides the consistent solid ink coverage required for this type of work.



Cushion-Mount™ Tapes (929, 933, 939, 949)

The high density Cushion-Mount products are designed for solids and high quality line work. The high density elastomeric foam carrier provides solid ink coverage similar to the Flexomount products, while offering the benefits of a cushioned tape. The compression properties of the high density foam help reduce cylinder bounce and offer improved performance in high quality line work and reverses with excellent solid ink density.

Typical Performance Characteristics

This data is from print trials using photopolymer plates and a magenta solvent based ink printed on a polyethylene substrate. Press settings were 400 fpm @ 2 mil impression, 600 line anilox roll.

Data is based on limited evaluations and should not be used for specification purposes.

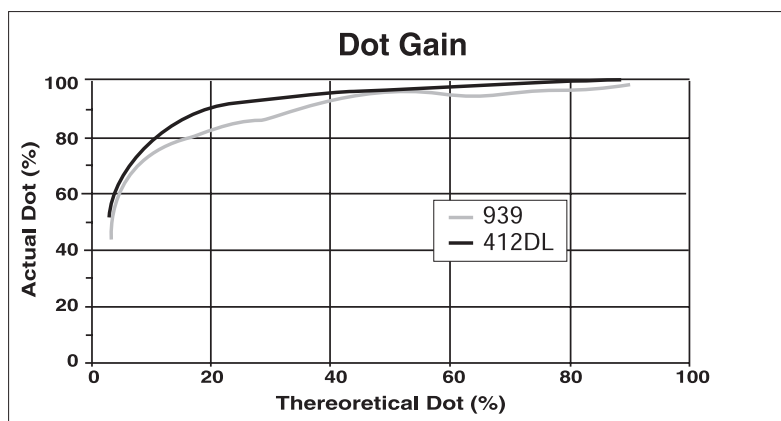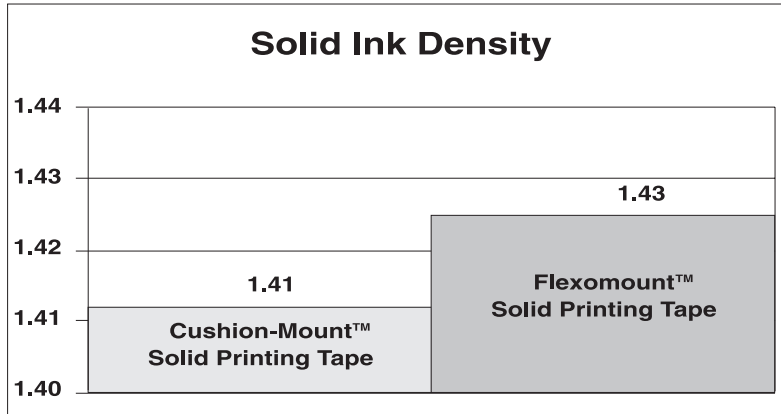

3M™ Plate Mounting Systems
Flexomount™ Solid Printing Tape
Cushion-Mount™ Solid Printing Tape
Flexographic Systems

FOD# 1588
page 6 of 6

**Typical Performance
Characteristics cont.**

Theoretical Dot (%)	ACTUAL DOT (%)	
	939 Cushion-Mount Solid Printing Tape	412DL Flexomount Solid Printing Tape
3%	19	23
5%	28	35
10%	45	51
20%	55	67
30%	72	77
40%	84	90
50%	94	96
60%	96	97
70%	99	98
80%	100	100
90%	100	100

**Technical Information
and Data**

The technical information and data, recommendations, and other statements provided are based on tests or experience which 3M believes to be reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use

Please remember that many factors can affect the use and performance of a 3M product in a particular application. The materials to be bonded with the product, the surface preparation of those materials, the product selected for use, the conditions in which the product is used, and the time and environmental conditions in which the product is expected to perform are among the many factors that can affect the use and performance of a 3M product. Given the variety of factors that can affect the use and performance of a 3M product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

**Warranty and
Limited Remedy**

The 3M product will be free from defects in material and manufacture for a period of one (1) year from the date of manufacture. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's method of application. If the 3M product is defective within the warranty period stated above, your exclusive remedy and 3M's sole obligation shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product.

**Limitation of Remedies
and Liability**

Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including contract, warranty, negligence, or strict liability.

ISO 9002

This Industrial Tape and Specialties Division product was manufactured under a 3M quality system registered to ISO 9002 standards.



Industrial Tape and Specialties Division

3M Center, Building 220-7W-03
St. Paul, MN 55144-1000
USA
1 800 362 3550
1 800 223 7427 Fax On Demand
www.3M.com

©3M 1999 70-0709-1010-7