

# Technical data sheet



Product: 2K PRIMER

Manufacturer: PERMABOND ENGINEERING ADHESIVES

Product group: KLEBSTOFF

Article group: PRIMER

Download: 07.04.2026

## PERMABOND 2K PRIMER

This data sheet was provided to you by Tewipack Uhl GmbH. The company tewipack Uhl GmbH assumes no responsibility for the topicality and the Accuracy of the information contained. The properties of the products can vary due to various influences such as composition and condition of the Substrate, impurities in or on the substrate, temperature and humidity at the Change storage and environmental conditions during use. Using this product in combination with other material, the customer is responsible for to check through our own tests whether the product is suitable for the planned combination and whether this combination delivers the expected results

Tewipack Uhl GmbH  
Industriestraße 15  
D-75382 Althengstett

Telephone:  
+49(0)7051/9297-0  
Fax:  
+49(0)7051/9297-99

E-Mail:  
info@tewipack.de  
Website:  
www.tewipack.de

Managing director:  
Alexander Uhl,  
Michael Uhl  
HRB 330424  
Amtsgericht  
Stuttgart

Bank details:  
Sparkasse  
Sindelfingen  
Pforzheim  
Calw  
BLZ 666 500  
85  
Konto 17 787

Commerzbank  
Sindelfingen  
BLZ 603 400 71  
Konto 8 001 166

Vereinigte  
Volksbank AG  
Böblingen  
BLZ 603 900 00  
Konto 80 089  
003

Postbank  
Stuttgart  
BLZ 600 100  
70  
Konto 146  
294 708

### Features & Benefits

- 💧 Improves adhesion
- 💧 Allows easy visual inspection of surface “bondability”
- 💧 Helps protect metal against corrosion, increasing durability

### Description

**Permabond 2K primer** is ideal for preparing metal, glass, plastic and composite materials ready for bonding with engineering adhesives. It contains an adhesion promoter which increases adhesion strength. It also gives a visible indication of whether a surface is “wetting out” properly (i.e. ready for bonding) or if further surface preparation is required. Permabond 2K Primer helps to protect metal surfaces, thus improving durability in harsh conditions.

### Physical Properties

Colour	Red
Viscosity	1 mPa.s (cP)
Flashpoint	>60°C (140°F)
Specific Gravity	1.0

### Storage & Handling

Mixed life	8 hours
Storage Temperature	5 to 25°C (41 to 77°F)
Shelf Life Stored in original unopened containers	24 months

### Additional Information

Users are reminded that all materials, whether innocuous or not, should be handled in accordance with the principles of good industrial hygiene. Full information can be obtained from the Safety Data Sheet.


**This Technical Datasheet (TDS) offers guideline information and does not constitute a specification.**

### Directions for Use

- Degrease and lightly abrade all bond areas and remove dust.
- Combine contents of A and B bottles in the larger bottle and attach the sprayer.
- Shake well
- Spray the bond area with a thin layer of mixed primer.



- Compare wetting with image above.
- If wetting is poor, more surface preparation is needed.
- If wetting is good, remove excess 2K Primer with a clean, dry cloth or tissue.
- Allow 2K Primer to dry thoroughly prior to bonding.
- Use within 8 hours of mixing

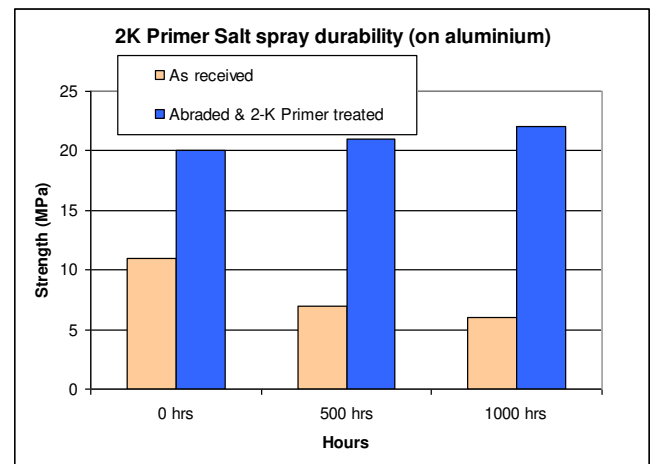

The graph above shows the use of Permabond 2K Primer on abraded aluminium surfaces bonded with a structural acrylic adhesive. The results of the salt spray aging test show improved durability.



[www.permabond.com](http://www.permabond.com)  
[www.permabond.co.uk](http://www.permabond.co.uk)

- UK: 0800 975 9800
- General Enquiries: +44 (0)1962 711661
- US: 732-868-1372
- Asia: + 86 21 5773 4913
- [info.europe@permabond.com](mailto:info.europe@permabond.com)
- [info.americas@permabond.com](mailto:info.americas@permabond.com)
- [info.asia@permabond.com](mailto:info.asia@permabond.com)

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.