

Technical data sheet



Product: 2707

Manufacturer: 3M DEUTSCHLAND GMBH

Product group: KLEBSTOFF

Article group: 2-K KLEBSTOFF

Download: 17.03.2026

3M™ THERMALLY CONDUCTIVE EPOXY TC-2707

This data sheet was provided to you by Tewipack Uhl GmbH. The company tewipack Uhl GmbH assumes no responsibility for the topicality and the Accuracy of the information contained. The properties of the products can vary due to various influences such as composition and condition of the Substrate, impurities in or on the substrate, temperature and humidity at the Change storage and environmental conditions during use. Using this product in combination with other material, the customer is responsible for to check through our own tests whether the product is suitable for the planned combination and whether this combination delivers the expected results

Tewipack Uhl GmbH
Industriestraße 15
D-75382 Althengstett

Telephone:
+49(0)7051/9297-0
Fax:
+49(0)7051/9297-99

E-Mail:
info@tewipack.de
Website:
www.tewipack.de

Managing director:
Alexander Uhl,
Michael Uhl
HRB 330424
Amtsgericht
Stuttgart

Bank details:
Sparkasse
Sindelfingen
Pforzheim
Calw
BLZ 666 500
85
Konto 17 787

Commerzbank
Sindelfingen
BLZ 603 400 71
Konto 8 001 166

Vereinigte
Volksbank AG
Böblingen
BLZ 603 900 00
Konto 80 089
003

Postbank
Stuttgart
BLZ 600 100
70
Konto 146
294 708

3M™ Thermally Conductive Epoxy Adhesive TC-2707

Product Description

3M™ Thermally Conductive Epoxy Adhesive TC-2707 is a thermally conductive 2-part epoxy using aluminum metal filler for good thermal conductivity with high adhesion.

Key Features

- High adhesive strength
- Slight tack allows pre-assembly
- Good surface wet out
- Low viscosity for potting applications
- Good gap filling
- Thin bonding line
- Good thermal conductivity (0.72 W/m-K)
- Low Cl ion content and outgassing
- Thermally and electrically conductive

Typical Uncured Properties

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

3M™ Thermally Conductive Epoxy Adhesive TC-2707		
Property		Value
*Viscosity	Base	95,00 cps
	Accelerator	25,000 cps
	Mixed	60,000 cps
Base Resin	Base	Epoxy
	Accelerator	Amine
Filler	Aluminum	50% by weight
Mix Ratio (B:A)	Volume	2:1
	Weight	2.00:0.96
Worklife		60 minutes at 23°C (72°F)

*Viscosity it measured 40mm, 2°cone at 10 1/sec.

Applications

- LED Assembly
- Thermal fixing battery cell and thermal management for EV/HEV battery
- Potting applications
- General gap filling

Application Techniques and Product Use

For bonding rigid to rigid parts, it is suggested that the bond line thickness and edge fill be designed to optimize:

3M™ Thermally Conductive Epoxy TC-2707

1. Bond Strength
2. Thermal Resistance

A typical suggested bond line is in the 3-7 mil (0.076- 0.018mm) thickness range, For improved thermal performance (lower Thermal Resistance), a thinner bond line is suggested. A thinner bond line can reduce the bond strength, so each application needs to be tested to find correct balance
Bond Line Thickness vs Thermal Resistance vs Bond Strength

A “fillet” at the edge of a bond line is suggested to increase bond strength. The fillets are formed as the epoxy squeezes out past the side edges. Fillets can add strength to the assembly.


3M™ Thermal Conductive Epoxy TC-2707 is supplied in dual syringe plastic duo-pak cartridges as part of the 3M™ EPX™ Plus II Applicator System. The duo-pak cartridges are supplied in a 37 or 50 ml configuration. To use the cartridge simply insert the duo-pak cartridge into the EPX applicator and start the plunger into the cylinders using light pressure on the trigger. Next, remove the duo-pak cartridge cap and expel and discard a small amount of adhesive to be sure both sides of the duo-pak cartridge are flowing evenly and freely (i.e.: no voids, “plugs of adhesive”, dis-continuity in flow, etc.) Once even side to side and uniform flow from both sides of the duo-pak is confirmed, attach the 3M EPX mixing nozzle to the duo-pak cartridge to ensure proper and uniform mixing of the Part A and Part B and begin dispensing the adhesive.

Partially used cartridges must follow the above use instructions to ensure consistent product performance.

Complete and uniform mixing as noted above of the two components is required to obtain consistent product performance.

3M™ EPX™ Plus II Applicator Mix Nozzles

Use only 3M™ EPX™ Plus II Applicator and Mix Nozzles to ensure optimum product performance.

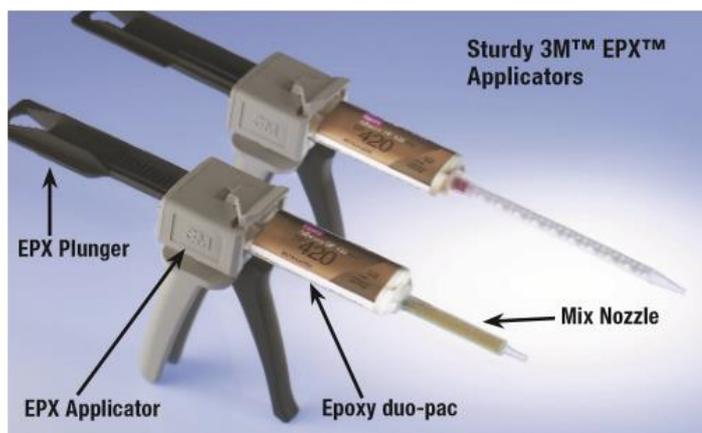

Typical Cured Physical Properties and Performance Characteristics

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes. Final product specifications and testing methods will be outlined in the products Certificate of Analysis (COA) that is shipped with the commercialized product once it is approved by 3M for general commercialization and development work is completed.

3M™ Thermally Conductive Epoxy Adhesive TC-2707		
Property	Method*	Value
Color		Gray
Shore D Hardness	ASTM D2240	80
Glass Transition Temperature	ASTM 1356	See Chart on page 3
Thermal Coefficient of Expansion	ASTM E831	75 X 10 ⁻⁶ /C (below Tg) 160 X10 ⁻⁶ /C (above Tg)
Thermal Conductivity	ASTM D5470	0.72 W/m-K
Thermal Impedance	ASTM D5470	3.51X 10 ⁻⁵ m°K/W (1 mil)

3M™ Thermally Conductive Epoxy TC-2707

Volume Resistivity¹	ASTM D257	1.6 x 10 ¹¹ ohm-cm
Total Outgassing	ASTM 5116	<1000 ug/g (GC/MS, 85 C/3 hours)
Siloxane Outgassing	ASTM 5516	<5 ug/g (GC/MS, 85C/3 hours)
Extractable Chloride	ASTM D7994	<30 ug/g (hexane extraction)

*Methods listed as ASTM are tested in accordance with the ASTM method noted

*Disclaimer if applicable to chart above

1) As the 3M™ Thermally Conductive Epoxy Adhesive TC-2707 uses aluminum metal fillers, under certain end use application conditions the effective resistivity and/or effective dielectric strength could be significantly lower than noted. If the metal filler is “trapped” or “pinched” between two surfaces, an electrical bridge path via the aluminum fillers could occur between these surfaces. Epoxy Adhesive TC-2707 is not suggested for application where a powered electrical circuit is used or where a reliable volume resistivity and/or dielectric strength is desired. 3M™ Thermally Conductive Epoxy Adhesive TC-2810 uses ceramic filler and is a suggested product to test for these types of application performances needs.

Curing

Cure Schedule: 23°C/24 hours
 50°C/270 minutes
 70°C/90 minutes
 90°C/30 minutes
 120°C/10 minutes

Typical Shear Strength, Peel Strength, Tg vs Cure Temperature/Time

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes. Final product specifications and testing methods will be outlined in the products Certificate of Analysis (COA) that is shipped with the commercialized product once it is approved by 3M for general commercialization and development work is completed.

3M™ Thermally Conductive Epoxy Adhesive TC-2707			
	23 °C (72 °F) 24 hours	90 °C (194 °F) 30 minutes	120 °C (248 °F) 10 minutes
Overlap Shears N/mm2 (psi) (ASTM D-1002)	>18.62 (2700)	>18.62 (2700)	>18.62 (2700)
T-Peel (piw) (ASTM D-1876)	>7	>7	>7
Tg (°C) (ASTM E-1356)	60	66	66

*Methods listed as ASTM are tested in accordance with the ASTM method noted

*Disclaimer if applicable to chart above

Storage and Shelf Life

The shelf life of 3M™ Thermally Conductive Epoxy Adhesive TC-2707 is 12 months from the date of manufacture when stored in original cartons at 21C (70F) and 50% relative humidity

Certificate of Analysis (COA)

The COA contains the 3M specifications and test methods for the products performance limits that the product will be supplied against. The 3M product is supplied to 3M COA test specifications and the COA test methods. Contact your local 3M representative for this product's COA.

3M™ Thermally Conductive Epoxy TC-2707

Safety Data Sheet: Consult Safety Data Sheet before use.

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer:

Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Safety

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Electronics Materials Solutions Division
3M Center, Building 224-3N-11
St. Paul, MN 55144-1000
1-800-251-8634 phone
651-778-4244 fax
www.3M.com/electronics

3M is a trademark of 3M Company.
Please recycle.
©3M 2018. All rights reserved.
60-5005-0111-3