

Technical data sheet



Product: 8

Manufacturer: 3M DEUTSCHLAND GMBH

Product group: ELEKTRO

Article group: VERGUSSMASSE

Download: 01.06.2025

3M™ SCOTCHCAST™ ELECTRICAL RESIN 8N

This data sheet was provided to you by Tewipack Uhl GmbH. The company tewipack Uhl GmbH assumes no responsibility for the topicality and the Accuracy of the information contained. The properties of the products can vary due to various influences such as composition and condition of the Substrate, impurities in or on the substrate, temperature and humidity at the Change storage and environmental conditions during use. Using this product in combination with other material, the customer is responsible for to check through our own tests whether the product is suitable for the planned combination and whether this combination delivers the expected results

Tewipack Uhl GmbH
Industriestraße 15
D-75382 Althengstett

Telephone:
+49(0)7051/9297-0
Fax:
+49(0)7051/9297-99

E-Mail:
info@tewipack.de
Website:
www.tewipack.de

Managing director:
Alexander Uhl,
Michael Uhl
HRB 330424
Amtsgericht
Stuttgart

Bank details:
Sparkasse
Sindelfingen
Pforzheim
Calw
BLZ 666 500
85
Konto 17 787

Commerzbank
Sindelfingen
BLZ 603 400 71
Konto 8 001 166

Vereinigte
Volksbank AG
Böblingen
BLZ 603 900 00
Konto 80 089
003

Postbank
Stuttgart
BLZ 600 100
70
Konto 146
294 708

3M™ Scotchcast™ Electrical Resin 8N

Two-Part, Room-Curing, Semiflexible,
Unfilled, Epoxy Liquid Resin

Data Sheet

September 2016

Description

3M™ Scotchcast™ Electrical Resin 8N is a low-stress, highly moisture-resistant compound that cures at room temperature. This epoxy resin system offers long pot life, low viscosity, a 1:1 mix ratio (by weight), Class B (130°C) temperature rating, and is commonly used to coat printed circuit boards, pot connectors, and impregnate electrical and electronic components. Because of its low exotherm, Scotchcast resin 8 is also frequently specified for impregnating and encapsulating temperature sensitive units.

- Low exotherm
- High moisture resistance
- Highly resistant to mechanical and thermal shock
- Extended pot life

Handling Properties

| | |
|------------------------------------|--|
| Mix Ratio (A-B) | Wt 1:1 Vol (%) 46:54 |
| Viscosity @ 23°C (73°F) | A = 12,500 cps B = 4,000 cps Mixed = 7,000 cps |
| Density | A = 1.16 kg/l (9.71 lbs/gal) B = 0.995 kg/l (8.30 lbs/gal) |
| Flash Point | A = 204°C (400°F) B = 201°C (395°F) |
| Gel Time | 30 min. @ 60°C (140°F) |
| Curing Guide | 23°C (73°F) 24-48 hrs 60°C (140°F) 2 hrs 95°C (203°F) 1 hr |

3M™ Scotchcast™ Electrical Resin 8N

Typical Properties

Note: These are typical values and should not be used for specification purposes.

| Physical Property (*See Test Method Table) | Typical Value US units (metric) |
|--|---------------------------------------|
| Color | Clear Amber |
| Hardness (Shore D) | 68 |
| Specific Gravity | 1.12 |
| Compressive Strength*¹ 10% Compression | 700 psi (49 kg/cm ²) |
| Tensile Strength*² Ultimate | 1700 psi (120 kg/cm ²) |
| Elongation (% at break)*² | 75 |
| Flexural Strength*³ | 875 psi (62 kg/cm ²) |
| Thermal Conductivity*⁴ (Cal • cm/cm ² • sec • °C) | 4.2 x 10 ⁻⁴ |
| Linear Thermal Expansion*⁴ (length/unit length/°C) | 15 x 10 ⁻⁵ |
| Thermal Shock*⁴ | Pass |
| Thermal Shock*⁴ 10 cycles - 55 to 130°C 1/8" (3.175 mm) Olyphant | Pass |
| Electric Strength*⁹ | 325 V/mil |
| Mechanical Shock*⁴ Ball Drop (lbs) | 7.75 (3,5 kg) |
| Moisture Absorption*⁴ % weight increase, 240 hrs. @ 96% R.H. | 1.6 |
| Thermal Aging % weight loss 10 days @ 105°C 1000 hrs. @ 130°C 1000 hrs. @ 155°C | 1.5 9.2 12.2 |
| Dielectric Constant*⁷ 900 Hz 23°C | 4.4 |
| Dissipation Factor*⁷ 1000 Hz 23°C | 0.09 |
| Volume Resistivity*⁸ | 10 ¹³ ohm-cm 23°C |
| Boiling Water Resistance 7 Days - % weight gain - Hardness Change (Shore D) | 3.6 60 |
| Hydrolytic Stability*⁶ 120 Days 71°C (160°F) 95% RH Hardness Loss % | 13 |

Test Methods

¹Fed. Std. No. 406, Method 1021

²Fed. Std. No. 406, Method 1011

³Fed. Std. No. 406, Method 1031

⁴MIL-I-16923E

⁵3M Test Method

⁶MIL-I-16923G

⁷Fed. Std. No. 406, Method 4021

⁸Fed. Std. No. 406, Method 4041

⁹Fed. Std. No. 406, Method 4031

3M™ Scotchcast™ Electrical Resin 8N

Usage Information

Mixing

Mix the separate parts before removing them from their containers. They may be warmed to 60°C (140°F) to aid the mixing process. (Gel time is approximately 30 minutes @ 60°C). Thoroughly mix parts A and B in the correct proportions. Mix until the color is absolutely uniform and a homogeneous mixture is obtained.

De-aerating

Air introduced during mixing can be removed by evacuating at 5 to 10 mm of mercury (Hg) absolute pressure. The 3M™ Scotchcast™ Electrical Resin can be warmed to aid air removal. The container sidewall should be four times the height of the liquid resin to contain the foaming that takes place under vacuum.

Casting and Impregnating


Pour the warm resin into the preheated 100°C (212°F) mold. If no mold is used, dip the preheated part into the resin. Heating the part, resin and mold aids impregnation. For maximum impregnation, evacuate at 5 mm mercury (Hg) absolute pressure, or pour under vacuum and hold for several minutes before releasing.

Curing


Where minimum stress and maximum thermal shock resistance are required, the ambient temperature cure cycle is recommended. (See "Curing Guide" of **Handling Properties** section). If an oven cure is used, time should be added to the cure cycle to allow the resin to reach the curing temperature. Cure using cycles shown under Handling Properties. Where higher temperatures are not objectionable and the size of the casting not excessive, the resin can be quick-cured in one hour at 95°C (203°F).

Handling and Safety Precautions

Read all Health Hazard, Precautionary and First Aid statements found in the Material Safety Data Sheet (MSDS) and/or product label of chemicals prior to handling or use.

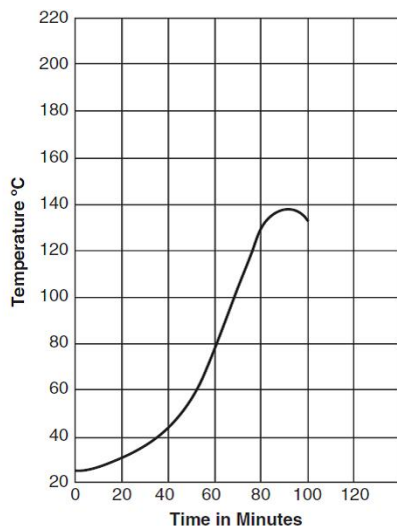

Exothermic Heat Rise for 1 lb. Sample

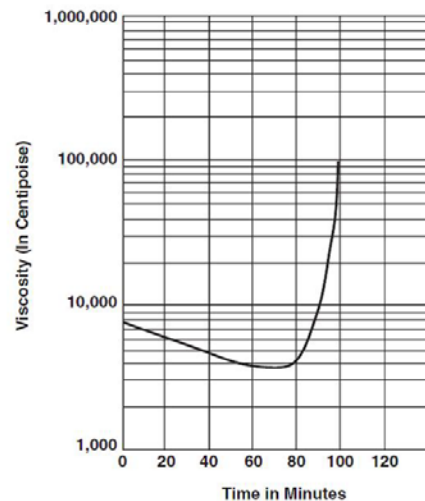


Brookfield Viscosity vs Time @ 73°F (23°C) 130 gram sample

3M™ Scotchcast™ Electrical Resin 8N

Volume Resistivity (ohm-cm)


Fed. Std. No. 406, Method 4041

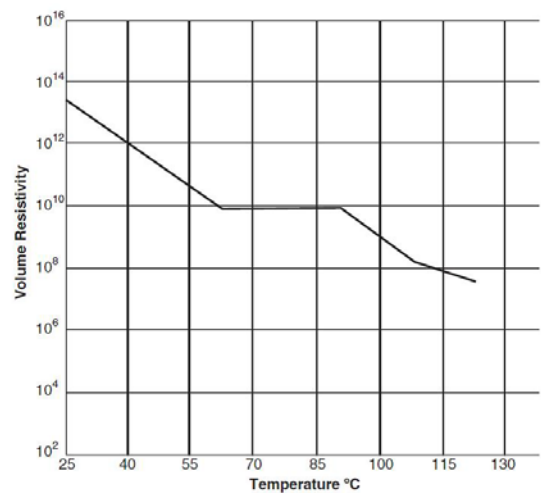

Dissipation Factor %

Fed. Std. No. 406


(Test Frequencies in Hertz)

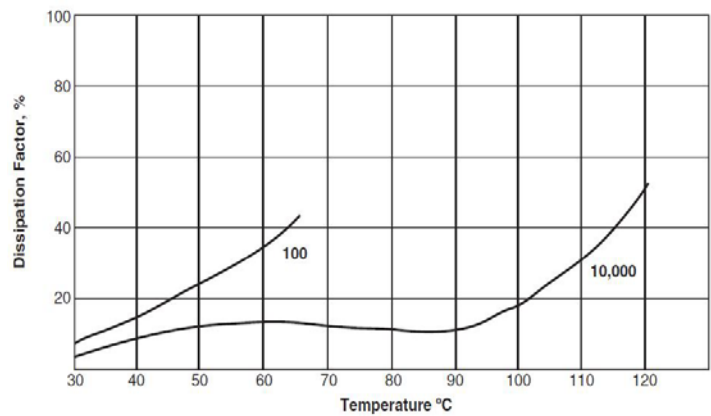

Dielectric Constant

Fed. Std. No. 406, Method 4021

(Test Frequencies in Hertz)

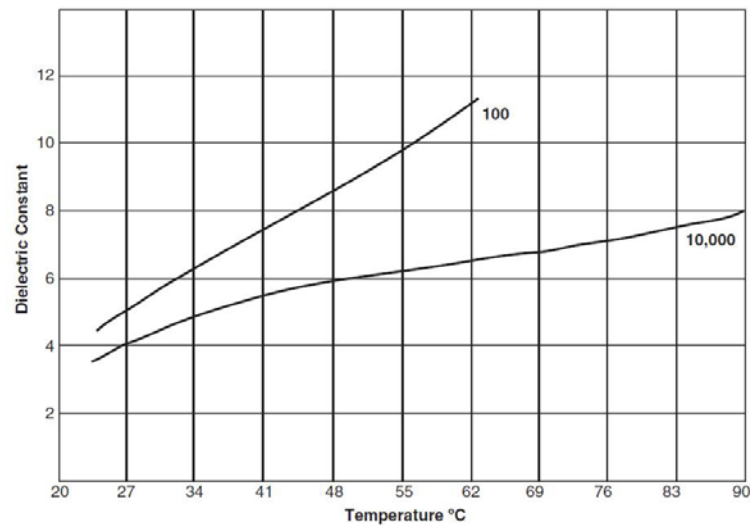

3M™ Scotchcast™ Electrical Resin 8N

| | |
|---------------------------------|---|
| Shelf Life & Storage | Both parts of this resin system should be stored at temperatures between 20 to 30 degrees Celsius, and 30% to 60% relative humidity. When not in use, containers should be kept tightly closed. Storage at conditions outside those suggested may compromise the performance of the resin. Shelf life is 2 years from date of manufacture when stored in humidity controlled storage. |
| Availability | Please contact your local distributor; available from 3M.com/electrical [Where to Buy] or call 1-800-676-8381. |

3M and Scotchcast are trademarks of 3M Company

| | |
|--|---|
| Important Notice | All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product, which are not contained in 3M's current publications, or any contrary statements contained on your purchase order, shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M. |
| Warranty; Limited Remedy; Limited Liability | This product will be free from defects in material and manufacture at the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any direct, indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted. |



Electrical Markets Division

6801 River Place Blvd.
Austin, TX 78726-9000
800.676.8381
FAX: 800.828.9329
www.3M.com/oem

Please recycle
© 3M 2016 All rights reserved
78-8141-9426-8 Rev A