

Technical data sheet



Product: ES5516

Manufacturer: PERMABOND ENGINEERING ADHESIVES

Product group: KLEBSTOFF

Article group: 1-K KLEBSTOFF

Download: 24.06.2026

PERMABOND® ES5516

This data sheet was provided to you by Tewipack Uhl GmbH. The company tewipack Uhl GmbH assumes no responsibility for the topicality and the Accuracy of the information contained. The properties of the products can vary due to various influences such as composition and condition of the Substrate, impurities in or on the substrate, temperature and humidity at the Change storage and environmental conditions during use. Using this product in combination with other material, the customer is responsible for to check through our own tests whether the product is suitable for the planned combination and whether this combination delivers the expected results

Tewipack Uhl GmbH
Industriestraße 15
D-75382 Althengstett

Telephone:
+49(0)7051/9297-0
Fax:
+49(0)7051/9297-99

E-Mail:
info@tewipack.de
Website:
www.tewipack.de

Managing director:
Alexander Uhl,
Michael Uhl
HRB 330424
Amtsgericht
Stuttgart

Bank details:
Sparkasse
Sindelfingen
Pforzheim
Calw
BLZ 666 500
85
Konto 17 787

Commerzbank
Sindelfingen
BLZ 603 400 71
Konto 8 001 166

Vereinigte
Volksbank AG
Böblingen
BLZ 603 900 00
Konto 80 089
003

Postbank
Stuttgart
BLZ 600 100
70
Konto 146
294 708

Features & Benefits

- Parts can be tacked in place with UV light
- UV fluorescence for in-line QC
- Excellent resistance to vibration
- High shear strength
- Structural bonding for high temperature applications
- Good resistance to chemicals

Description

PERMABOND[®] ES5516 is a unique, lightly thixotropic, toughened, heat-cured adhesive. Before curing, it can be tacked or sealed in place with UV light. ES5516 is ideally suited for bonding magnets in synchronous motors, or fixing any small-sized close fitting parts where there is no ability to mechanically clamp. ES5516 exhibits good chemical resistance as well as excellent heat resistance on metals and composites and maintains a high structural strength at 180°C, making it suitable for Class H electric motor bonding applications.

Physical Properties of Uncured Adhesive

Chemical composition	Epoxy Resin
Appearance	Ivory – yellow once cured
Viscosity @ 25°C	4,500 mPa.s (cP) Thixotropic
Specific gravity	1.17

Typical Curing Properties

Flow at high temperature	Free flowing at 150°C
Maximum gap fill	0.5 mm 0.02 in
Fixture time with UV-LED lamp (400nm, 150mW/cm ²)	30 seconds
Cure speed (oven)*	150°C (300°F): 60 minutes

*Actual cure times will depend on the time it takes for the adhesive to reach this temperature - for example, large assemblies or a crowded oven will require longer to reach full cure.

The information given and the recommendations made herein are based on our research and are believed to be accurate, but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care[®] program.

Typical Performance of Cured Adhesive

Shear strength* (ISO4587)	Mild Steel 23 N/mm ² (3336 psi) Aluminium 22 N/mm ² (3190 psi) Stainless Steel 29 N/mm ² (4206 psi) Hot Dip Galv 15 N/mm ² (2175 psi) Tin 7 N/mm ² (1015 psi) Zintec 20 N/mm ² (2900 psi) PBT 6 N/mm ² **SF (2175 psi)
Impact strength (ASTM D950)	25-35 KJ/m ²
Hardness (ISO868)	>75 Shore D
Thermal conductivity	0.66 W/(m.K)

*Strength results will vary depending on the level of surface preparation and gap.

**SF denotes substrate failure


Hot Strength Data

Mild Steel @150°C	18 N/mm ² (2610 psi)
Mild Steel @180°C	8 N/mm ² (1160 psi)
Mild Steel @200°C	5 N/mm ² (725 psi)
Aluminium @150°C	15 N/mm ² (2175 psi)
Aluminium @200°C	8 N/mm ² (1160 psi)
Stainless Steel @200°C	10 N/mm ² (1450 psi)

"Hot strength" shear strength tests were fully cured then conditioned to pull temperature for 30 minutes before testing.

ES5516 can withstand higher temperatures for brief periods (such as for paint baking and wave soldering processes) providing the joint is not unduly stressed. The minimum temperature the cured adhesive can be exposed to is -40°C (-40°F) depending on the materials being bonded.

Chemical Resistance

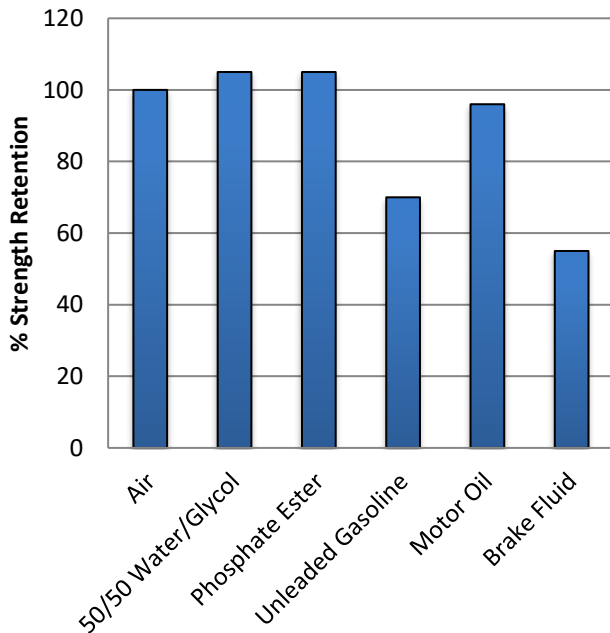

Specimens were immersed for 30 days at 85°C and tested at room temperature.

Surface Preparation

Surfaces should be clean, dry and grease-free before applying the adhesive. Use a suitable solvent (such as acetone or isopropanol) for the degreasing of surfaces. Some metals such as aluminium, copper and its alloys will benefit from light abrasion with emery cloth (or similar), to remove the oxide layer.

Directions for Use

- 1) The adhesive should be dispensed from the cartridge via the nozzle supplied (this can be cut to give the appropriate sized bead to cover the bond area).
- 2) Apply the adhesive to one surface and avoid entrapping air.
- 3) Assemble parts applying sufficient pressure to ensure the adhesive spreads to cover the entire bond area.
- 4) Use a jig / clamp to prevent parts moving during cure.
- 5) It is advisable not to disturb the joint until the adhesive is fully cured.
- 6) Cure with heat – see page one for cure schedule.

Additional Information

This product is not recommended for use in contact with strong oxidizing materials.

Information regarding the safe handling of this material may be obtained from the material safety data sheet (MSDS).

Users are reminded that all materials, whether innocuous or not, should be handled in accordance with the principles of good industrial hygiene.

Storage & Handling

Storage Temperature	2 to 7°C (35 to 45°F)
---------------------	-----------------------

Video Links

Surface preparation:

<https://youtu.be/8CMOMP7hXjU>



Single-part epoxy directions for use:

https://youtu.be/_KupaieuuZw



www.permabond.com

• UK: 0800 975 9800

• General Enquiries: +44 (0)1962 711661

• US: 732-868-1372

• Asia: + 86 21 5773 4913

info.europe@permabond.com

info.americas@permabond.com

info.asia@permabond.com

The information given and the recommendations made herein are based on our research and are believed to be accurate, but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.

Permabond ES5516

Global TDS Revision 0

05 March 2025

Page 2/2

FOR PROFESSIONAL OR INDUSTRIAL USE ONLY. KEEP OUT OF REACH OF CHILDREN