



Lens types for bluepoint LED head HP

Optic 3

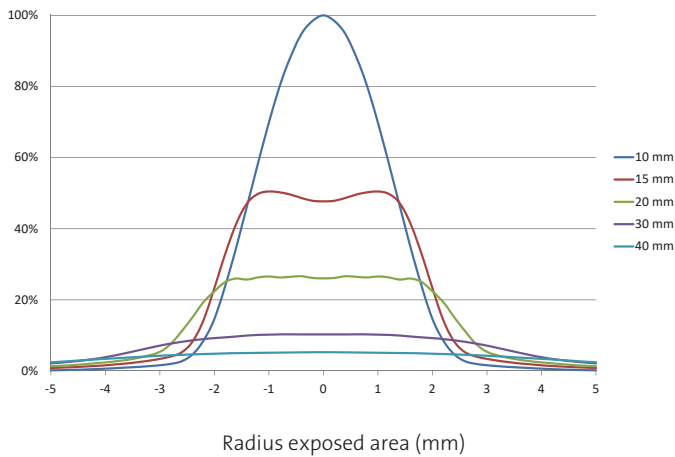


Wavelength (nm)	365	385	405
Intensity* (mW/cm²) at 100%	14000	20000	20000
Working distance (mm)	10		
Full-width at half maximum (mm)	3		

Optic 7

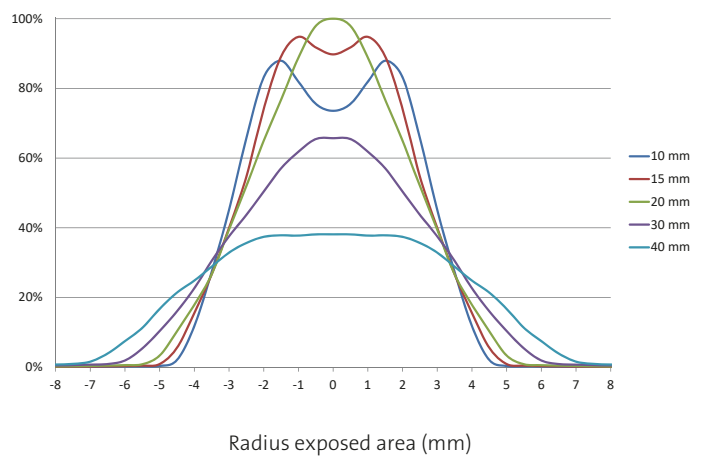


Wavelength (nm)	365	385	405
Intensity* (mW/cm²) at 100%	4000	4800	3800
Working distance (mm)	10		
Full-width at half maximum (mm)	7		

Optic 10

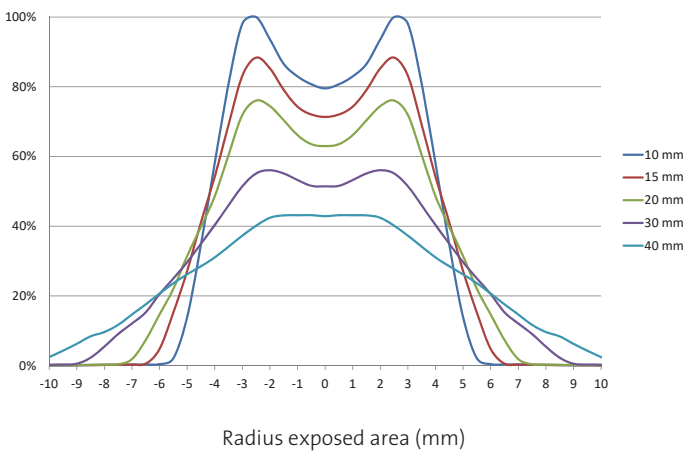

Wavelength (nm)	365	385	405
Intensity* (mW/cm²) at 100%	2000	2600	2400
Working distance (mm)	20		
Full-width at half maximum (mm)	10		



Optic 20

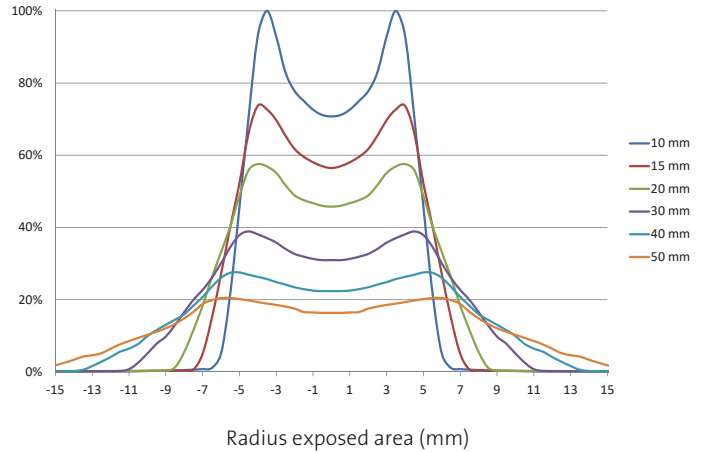

Wavelength (nm)	365	385	405
Intensity* (mW/cm²) at 100%	1450	1850	1650
Working distance (mm)	40		
Full-width at half maximum (mm)	20		

*measured with a Hönle UV meter and LED light guide sensor L2


Optic 10x2 (rectangular)

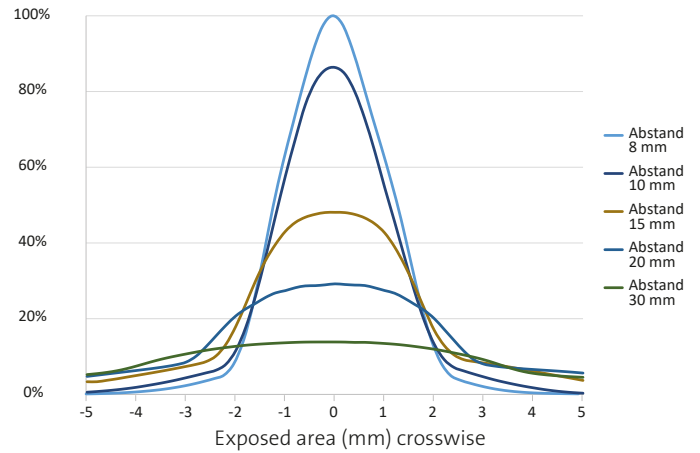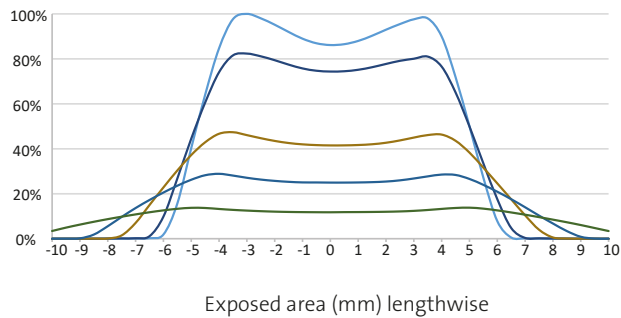


Wavelength (nm)	365	385	405
Intensity* (mW/cm²) at 100%	4500	7000	7000
Working distance (mm)	8		
half-width, crosswise (mm)	2.5		
half-width, lengthwise (mm)	10		

*measured with a Höhle UV meter and LED light guide sensor L2

Drawing LED head HP

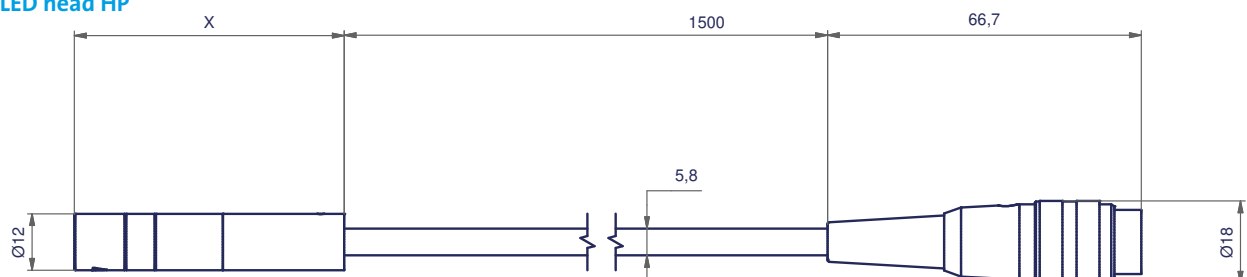

Mounting adapter LED head HP

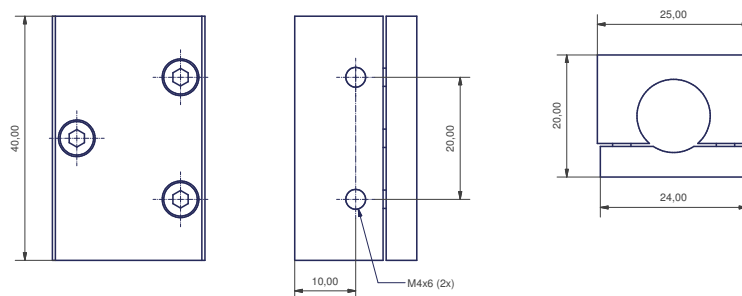

Lens type	Length LED head HP (x) in mm
Optic 3	55.9
Optic 7	57.3
Optic 10	54.5
Optic 20	52.5
Optic 10x2	55.4

tewipack
Klebertechnik

tewipack Uhl GmbH
Industriestraße 15
D-75382 Althengstett
www.tewipack.de

info@tewipack.de
T +49 (7051) 9297 0
shop.tewipack.de

KLEBEN VERBINDET |