

Technical data sheet



Product: D9605

Manufacturer: NITTO BELGIUM N.V.

Product group: KLEBEBAND

Article group: DOPPELSEITIG

Download: 28.04.2024

NITTO D9605

This data sheet was provided to you by Tewipack Uhl GmbH. The company tewipack Uhl GmbH assumes no responsibility for the topicality and the Accuracy of the information contained. The properties of the products can vary due to various influences such as composition and condition of the Substrate, impurities in or on the substrate, temperature and humidity at the Change storage and environmental conditions during use. Using this product in combination with other material, the customer is responsible for to check through our own tests whether the product is suitable for the planned combination and whether this combination delivers the expected results

Tewipack Uhl GmbH
Industriestraße 15
D-75382 Althengstett

Telephone:
+49(0)7051/9297-0
Fax:
+49(0)7051/9297-99

E-Mail:
info@tewipack.de
Website:
www.tewipack.de

Managing director:
Alexander Uhl,
Michael Uhl
HRB 330424
Amtsgericht
Stuttgart

Bank details:
Sparkasse
Sindelfingen
Pforzheim
Calw
BLZ 666 500
85
Konto 17 787

Commerzbank
Sindelfingen
BLZ 603 400 71
Konto 8 001 166

Vereinigte
Volksbank AG
Böblingen
BLZ 603 900 00
Konto 80 089
003


Postbank
Stuttgart
BLZ 600 100
70
Konto 146
294 708

D9605

General description

Nitto D9605 is a double-coated tapes with a polyester carrier coated with an aggressive acrylic adhesive used for mounting of different types of plastics.

Construction

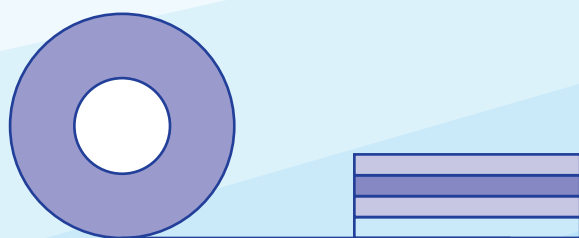

- Modified acrylic adhesive
- Polyester carrier
- Modified acrylic adhesive
- Release liner

Characteristics

D9605 is a heavy duty multi-purpose double-coated tapes with a high adhesion level on different substrates such as plastics, foams and metals. The tapes are suitable for rough surface bonding.

The PET carrier provides dimensional stability resulting in reduced elongation and shrinkage.


D9605 is available in bobbin shape.

Application

Nitto D9605 is used for mounting decorative profiles in furniture industry (trim mounting), cable ducts. Available in bobbin shapes designed for continuous application process.

Suitable for mounting price information holders and plastic parts in sign & nameplate markets for marketing devices (Point Of Sales).

CORE FUNCTION



TO ADHERE


Features

- high adhesion on different substrates & rough surfaces
- high temperature resistance
- high holding power
- easy processing
- bobbin shape
- RoHS compliant (2011/65/EC, 2015/863)



EcoVadis: World's most trusted business sustainability rating company.

Edition: April 2021
Code: DS/06.09/ D9605 series ENG
This datasheet replaces all previous versions



Technical Properties

General physical properties

	Typical Value	Test Method
Tape thickness*	0.220 mm	EN 1942
Adhesive type	Modified acrylic adhesive	
Release liner type	Siliconised havana paper (90 g/m ²)	
Carrier type	Polyester (0.050 mm)	
Adhesion to BA steel	2000 cN/20mm	EN 1939
Release value	30 cN/50mm	Nitto Belgium Test Method
Static shear	1 mm/3h	EN 1943
Optimum transport and storage conditions	Temperature 15 °C to 35 °C Relative humidity 40 to 85% RH	

* Tape thickness = Total thickness without liner

Details from the test methods are described on the customer product specification.

CAUTION: The above are typical values and should not be used in writing specifications.

Performance properties

Weight Added Peel Off (WAPO)		2h at 60 °C, width 20mm, 100g	
PP 16 mm/2h	ABS 13 mm/2h	BA 3 mm/2h	
Saft test (shear adhesion failure temperature)		185 °C	
Dynamic shear		+0.5 °C/min, 20x15mm, 200g	
Adhesion		350 N/4cm ²	
		tested after 15min., 300mm/min	
		EN 1939	
PC 2300 cN/20mm	ABS 1800 cN/20mm	PP 700 cN/20mm	
PMMA 2000 cN/20mm	Glass 2300 cN/20mm		

Warranty

The product is guaranteed to be free from defect in material and workmanship at the time of delivery and will be suitable for use for a period of 12 months thereafter, subject to the conditions set out herein.

Application guidelines

- Keep the tape in its original packaging until use.
- For optimum results, an even rub down pressure must be applied to the taped area to create the best possible adhesion between tape and the substrates.
- Remove the liner prior to usage.
- The tape should be applied to clean and dry surfaces.
- The best application conditions are obtained at a temperature between 15 °C and 40 °C.

General conditions of use and precautions:

The properties of the product might be adversely affected by various elements such as composition, condition and surface of and impurities in or on the substrate, temperature and humidity during storage, the surrounding environment at and after application and time of exterior use. When the product is used in combination with another material or process, the user shall assure the compatibility of the product in such combination and whether this combination results in the expected performance. The same principle applies in the event of product use in extreme conditions or circumstances, whether at or after the moment of application, including extended exposure to sunlight or extreme temperatures and pressure.

Packaging, transport and storage:

During transport and storage the product should always be protected against direct sunlight and extremes in temperature and humidity and contained in its original packaging. Once removed from its packaging, it should be promptly applied and remain shielded from direct sunlight and extreme temperature as well as protected against dust and other impurities.

Liability:

Except for its wilful misconduct, Nitto Belgium's liability shall be limited to a replacement, a reimbursement or an additional delivery of the product, and shall not exceed the purchase price of the products. In no event shall Nitto be liable in respect of any indirect or consequential damages, including loss of profits. The above limitations of liability shall equally apply if Nitto Belgium has assisted in any manner with the selection, treatment or application of the product. Nitto's liability is limited to the terms and conditions provided in the Product Specification and Nitto's General Terms and Conditions of Sale.

Product information:

This datasheet provides a general description of the product properties and application scope. Full technical details in connection with this product are presented in the customer product specification, which is available upon request.

The information reflected in this datasheet is subject to change and the product described herein may be modified or discontinued without notice.

Nitto Belgium NV has obtained following certificates:

- ISO 9001
- ISO 14001
- IATF 16949

Please check our website for applicable scope

If you require additional information on technical properties and application as well as product sampling or testing, please contact your local Nitto sales office.

Edition: April 2021

Code: DS/01.11/E4 D9605 ENG

This datasheet replaces all previous versions

Nitto

Innovation for Customers