


2265279 EQ PU20 Digital Peristaltic Dispenser

Product Description Sheet





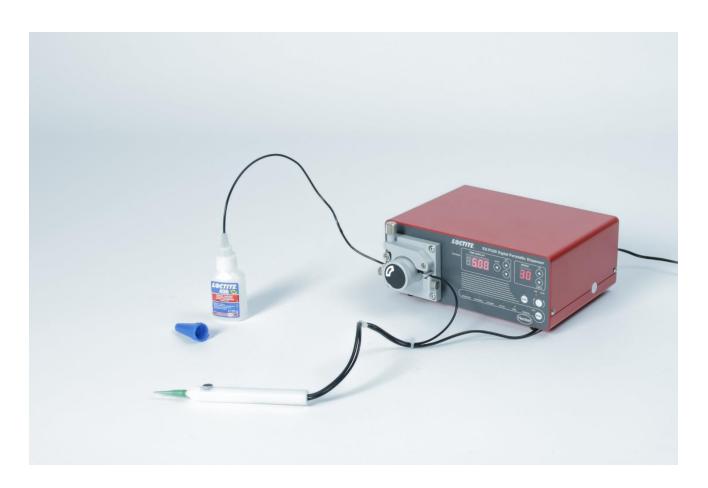

Product Features

- Air-free dispensing eliminates air in product.
- Forward and reverse motion of rotor.
- Instant reverse for vacuum suck-back; shuts off the flow of liquid and prevents dripping.
- Adjustable post-delay time for vacuum setting.
- Simple and convenient load mechanism for tubing replacement.
- Digital motor speed adjustment and display
- Digital timer display
- Full range input power
- "Teach In" and program memory saving function.
- Multi Running Mode

Technical Data


Power Supply 110/220 VAC; 50/60 Hz.
Dispense time range 0.01 – 99.99 seconds

Rotor Speed: Up to 120 rpm(CW/CCW)
 Maximum Flow Rate: Up to 6 ml. per minute

• Dimensions 212 W x 89 H x 189.5 D (mm)

Suck-back
 Programmable by reversing the direction of rotor.

Motor Repeatability +/-5%
 Timer Repeatability +/-10ms

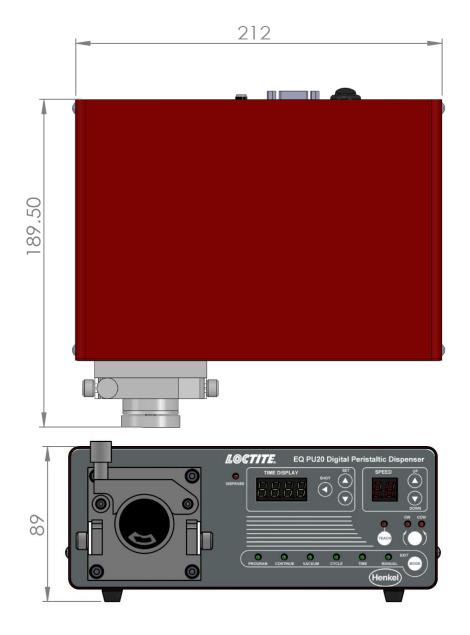

Accessories and Spare Parts:

- Foot Switch, item # 97201; IDH # 88653
- Feedline Tubing: 1.6 mm OD x 1.0 mm ID x 20 meters long, white, item # 8953142; IDH # 1087219
- Feedline Tubing: 1.6 mm OD x 1.0 mm ID x 20 meters long, black, item # 8953183; IDH # 1109147`

- Feedline Tubing: 2.0 mm OD x 1.4 mm ID x 20 meters long, clear, item # 8954866; IDH # 1001830
- Feedline Tubing: 2.0 mm OD x 1.4 mm ID x 20 meters long, black, item # 8953184: IDH # 1109318
- Feedline Tubing: 2.5 mm OD x 1.7 mm ID x 20 meters long, clear, item # 8953185; IDH # 1109317
- Feedline Tubing: 2.5 mm OD x 1.7 mm ID x 20 meters long, black, item # 8953000; IDH # 1070736
- Feedline Tubing: 3.2 mm OD x 2.4 mm ID x 20 meters long, clear, item # 8953182; IDH # 1019162
- Feedline Tubing: 3.2 mm OD x 2.4 mm ID x 20 meters long, black, item # 8953001; IDH # 1070735
- EQ PU20 Tip Adapter 18mm x 3.2mm; IDH# 2737717
- EQ PU20 Tip Adapter 18mm x 2.5mm; IDH# 2737716
- EQ PU20 Tip Adapter 18mm x 2.0mm; IDH# 2737715
- EQ PU20 Tip Adapter 18mm x 1.6mm; IDH# 2737714
- EQ PU20 Applicator Assembly 18mm; IDH# 2737712
- EQ PU20 Pump Head; IDH# 2737713
- Showcase Needle Variety Kit, item # 98439

Note

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits. The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere.

denotes a trademark registered in the U.S. Patent and Trademark Office.

Document # 9000621, Rev.C, Date: 12/15/2020

Henkel Americas
1-800-LOCTITE
www.equipment.loctite.com

Henkel Europe +49.89.320800.1800

Henkel Asia Pacific +86.21.2891.8863 www.henkel.com/industrial

www.henkel.com/industrial