

3M Science.
Applied to Life.™



**3M™ Safety-Walk™
Slip-Resistant
Tapes and Treads**



3M™ Safety-Walk™ Slip-Resistant Tapes and Treads now have proprietary 3M™ Controltac™ Film Technology and 3M™ Comply™ Adhesive Technology in the liner for the 300, 500, 600 and 700 series products.


3M™ Safety-Walk™ Slip-Resistant Tapes and Treads offer a quick and easy way to add traction to a variety of surfaces.

Proprietary technology offers several benefits:


- 3M™ Controltac™ Film technology allows the product to be repositioned on the surface before pressing down before its final adhesion – saving time and virtually eliminating rework.
- 3M™ Comply™ Adhesive technology provides air release channels that are replicated onto the Safety Walk™ adhesive. These channels provide a bubble-free application, ensuring a smooth adhesion to the surface.

3M™ Safety-Walk™ Slip-Resistant Tapes and Treads have greater surface adhesion than competitive traction materials, providing more durability and long-lasting performance.


80% higher initial adhesion vs competition.

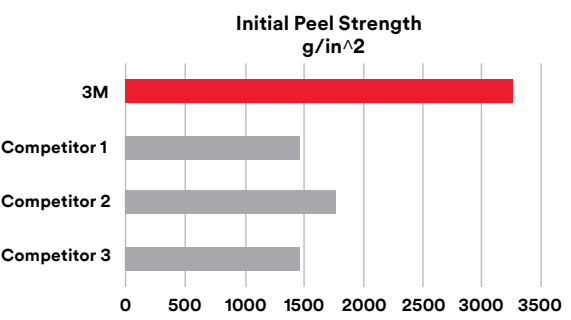

30% stronger long term adhesion vs competition.

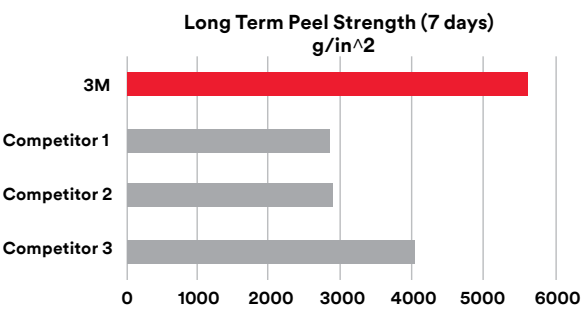

Available in many sizes, colors and textures, along with multi-color, printed and luminescent – you can accomplish both your functional and visual goals.

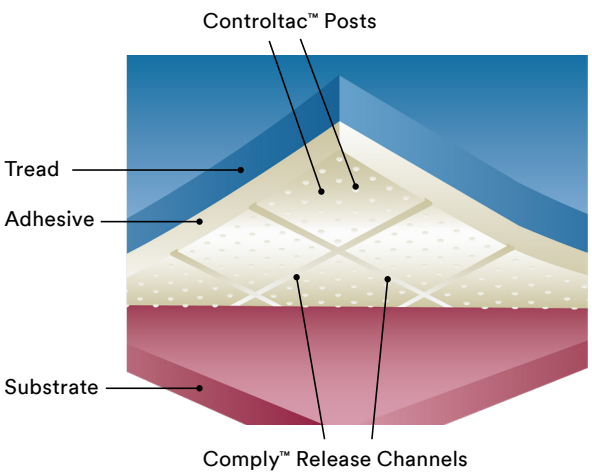

200 Series.


For wet, barefoot traffic areas

| | | |
|-------|-------|-------|
| 220 | 280 | 7705 |
| Clear | White | White |



3M™ Safety-Walk™ Slip-Resistant Fine Resilient Tapes and Treads

Showers | Tubs | Surfboards |
Around hot tubs and pools

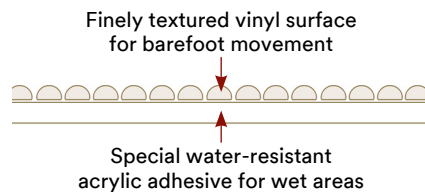

One 5-oz tube of 3M™ Safety-Walk™ Edging Compound provides 100' of resilient liquid seal to prevent edge lift and extend durability of slip-resistant safety tapes and treads.



300 Series.


For barefoot and shoe traffic areas

| | |
|-------|------|
| 310 | 370 |
| Black | Gray |



3M™ Safety-Walk™ Slip-Resistant Medium Resilient Tapes and Treads

Locker rooms | Around hot tubs and
pools | Boats | Personal watercraft |
Water skis | Exercise equipment |
Conveyers

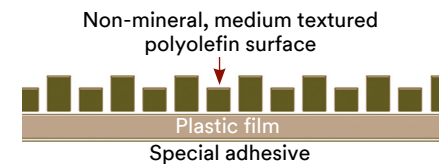


500 Series.

For irregular and contoured surfaces




3M™ Safety-Walk™ Slip-Resistant Conformable Tapes and Treads

Stairs | Ladders | Loading ramps | Platforms | Irregular surfaces like diamond plating | Flat surfaces with rivets or screw heads

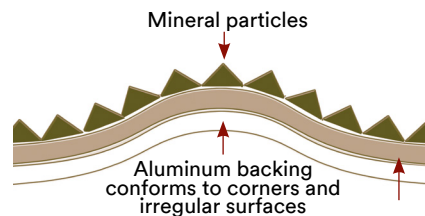


700 Series.

For extreme conditions

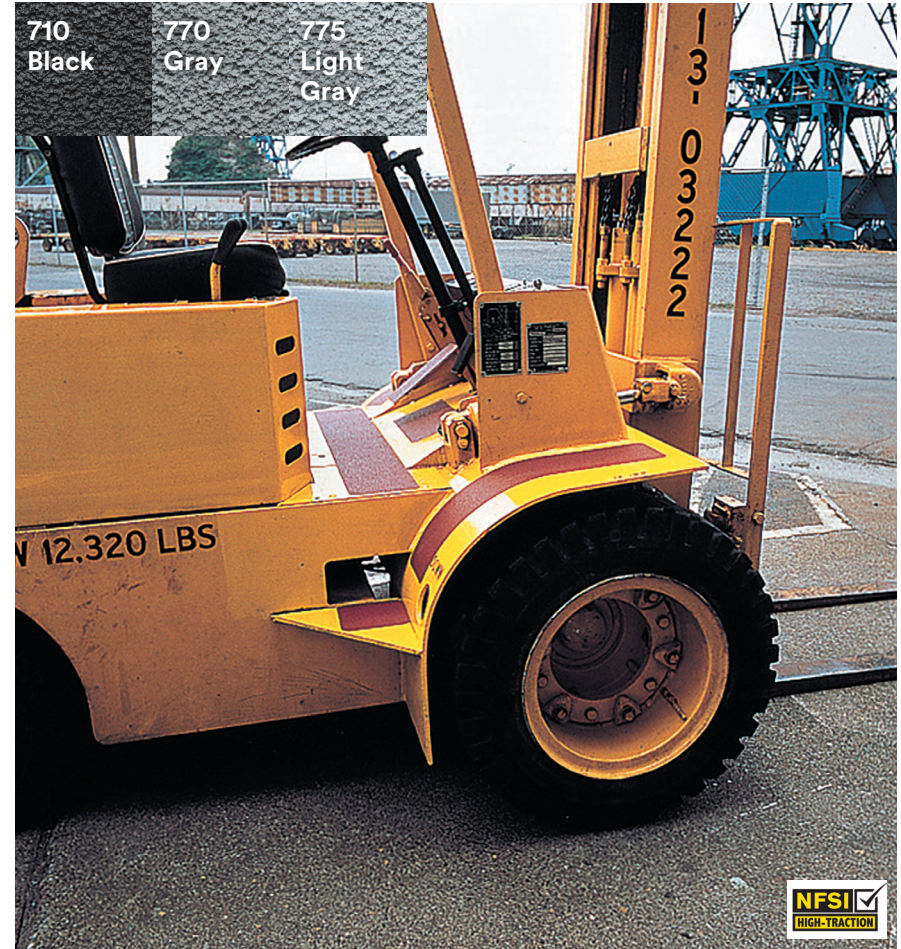

3M™ Safety-Walk™ Slip-Resistant Coarse Tapes and Treads

Construction vehicles | Ship and plane decks | Trains | Semi-trailers | Oily wet areas | Platforms and ramps | Machine shops | Agriculture and forestry equipment | Recreational vehicles

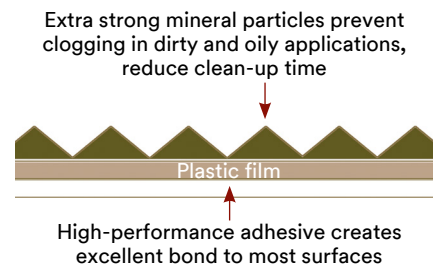

600 Series.

For light to heavy shoe traffic areas



3M™ Safety-Walk™ Slip-Resistant General Purpose Tapes and Treads

Flat surfaces | Steps | Stairways | Entrances | Ramps | Ladders | Lawn equipment | Snowmobiles | Scooters | Construction machinery and vehicles | Other machinery and vehicles

Highly durable mineral particles with low profile that helps reduce trip hazard



620 Clear abrasive tape can be placed over your graphics.



600 Series.

For shoe traffic areas with graphic opportunity



3M™ Safety-Walk™ Slip-Resistant General Purpose Tapes and Treads

3M™ Safety-Walk™ Slip-Resistant Tapes and Treads Ordering Information

| | Model Number | Color | Description | Tread Sizes | Tape Sizes |
|------------|--------------|---------------------|------------------|---|--|
| 200 Series | 220 | Clear | Fine Resilient | 6 in. x 24 in. | Custom sizes available from 1 in. to 48 in wide x 6 ft. to 480 ft. long. Also available in standard sizes. |
| | 280 | White | | | |
| | 7705 | White | | | |
| 300 Series | 310 | Black | Medium Resilient | 6 in. x 24 in. | Custom sizes available from 1 in. to 48 in wide x 6 ft. to 480 ft. long. Also available in standard sizes. |
| | 370 | Gray | | | |
| 500 Series | 510 | Black | Conformable | 6 in. x 24 in. | Custom sizes available from 1 in. to 48 in wide x 6 ft. to 480 ft. long. Also available in standard sizes. |
| | 530 | Safety Yellow | | | |
| 600 Series | 600 | White | General Purpose | 3/4 in. x 24 in. 5-1/2 in. x 5-1/2 in. 6 in. x 24 in. | Custom sizes available from 1 in. to 48 in wide x 6 ft. to 480 ft. long. Also available in standard sizes. |
| | 610 | Black | | | |
| | 613 | Yellow-Black | | | |
| | 620 | Clear | | | |
| | 630 | Safety Yellow | | | |
| | 688 | White/ Printable | | | |
| 700 Series | 710 | Black | Coarse | 6 in. x 24 in. | Custom sizes available from 1 in. to 48 in wide x 6 ft. to 480 ft. long. Also available in standard sizes. |
| | 770 | Gray | | 48 in. by 60 ft. | Custom sizes available from 1 in. to 48 in wide x 6 ft. to 480 ft. long. Also available in standard sizes. |
| | 775 | Light Gray | | | |

Technical Information: Technical information, guidance, and other statements provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license to any intellectual property rights is granted or implied with respect to this technical information.

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment, reviewing all applicable regulations and standards, and reviewing the product label and use instructions. Failure to properly evaluate, select, and use a 3M product in accordance with instructions or to meet all applicable safety regulations may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.



tevipack Uhl GmbH
 Industriestraße 15
 D-75382 Althengstett
 www.tevipack.de
 info@tevipack.de
 T +49 (7051) 9297 0
 shop.tevipack.de

KLEBEN VERBINDET |



3M™ Safety-Walk™ Slip Resistant Tapes and Treads Series 200 and 300 have been certified by the National Floor Safety Institute (NFSI) as being "slip-resistant".



3M™ Safety-Walk™ High Traction Tapes and Treads Series 500, 600 and 700 have been certified by the National Floor Safety Institute (NFSI) as providing "high-traction". A wet static coefficient of friction (SCOF) of greater than 0.60 was chosen by NFSI as the criteria for "high-traction" because according to NFSI, floor surfaces maintaining this level of slip resistance when wet have proven to reduce slip-and-fall claims between 50% and 90%.



3M Commercial Branding & Transportation
 3M Center, Bldg. 223-3N
 St. Paul, MN 55144-1000



3M, Comply, Controltac, and Safety-Walk are trademarks of 3M. The NFSI logo is a registered trademark of the National Floor Safety Institute. 3M and Safety-Walk are trademarks of 3M. Used under license in Canada. © 3M 2025. All rights reserved.
 78-8134-0719-0